


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN210761	FIRST EDITION	21-12-27	Hongmei	Martin	Ken

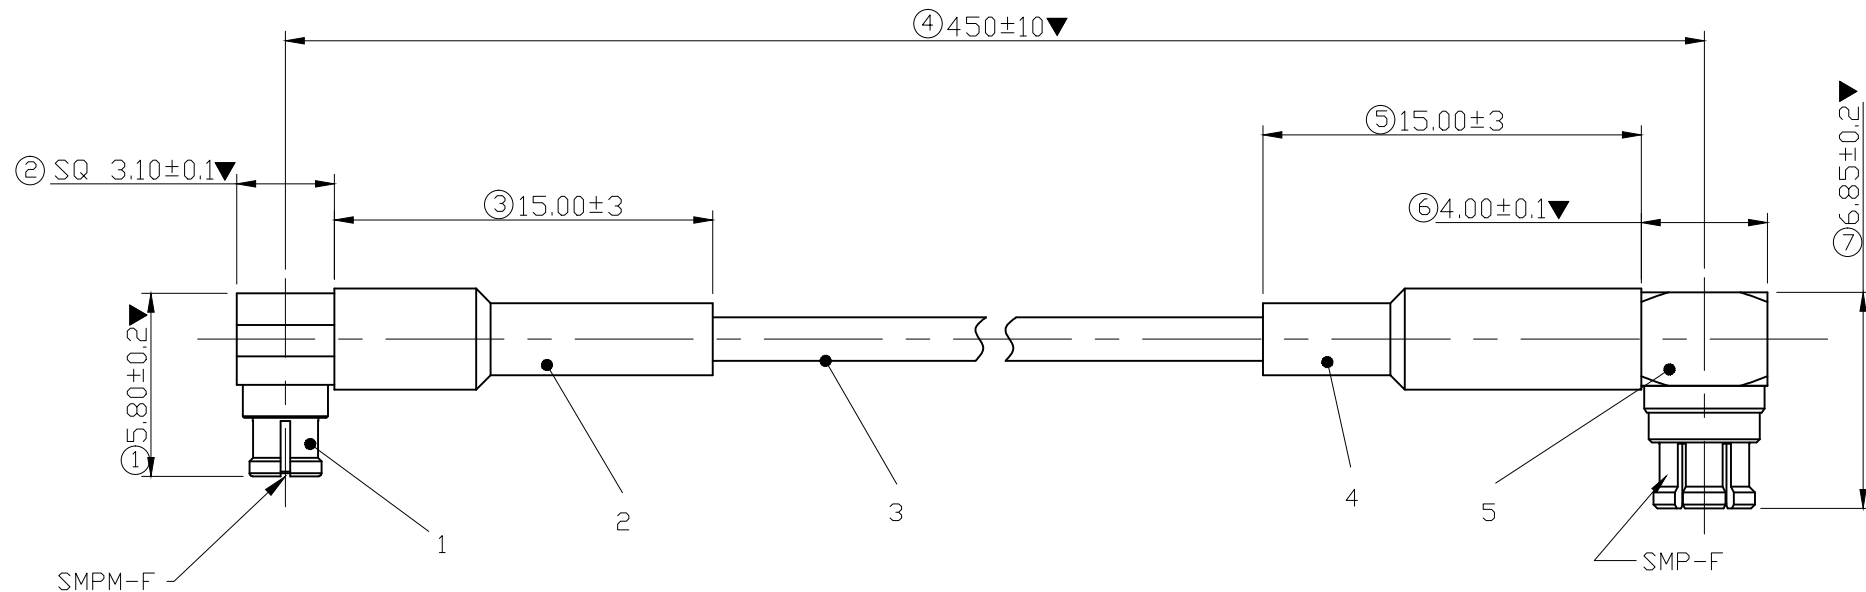

技术参数 TECHNICAL PARAMETERS:

- 电气特性 ELECTRICAL CHARACTERISTICS  
 特性阻抗 IMPEDANCE: 50 Ω  
 频率范围 FREQUENCY: DC-8.5 GHz  
 电压驻波比 VSWR: <1.3@DC-6GHz; <1.35@6-8.5GHz;  
 插入损耗 INSERTION LOSS: <3.0DB@DC-6GHz; <3.5DB@6-8.5GHz;  
 耐压 WITHSTANDING VOLTAGE: >500 V AC/1MIN
- 机械寿命 DURABILITY: >500 CYCLES
- 环境特性 ENVIRONMENTAL CHARACTERISTICS  
 工作温度范围 OPERATING TEMPERATURE RANGE: -40 °C ~ +85 °C  
 湿度范围 HUMIDITY RANGE: 15%~85%。
- 有害物质需符合 ECT《QE-Q-19-001 环境有害物质管理基准》管控标准  
 HAZARDOUS SUBSTANCES SHALL CONFORM TO ECT“QE-Q-19-001  
 ENVIRONMENTAL HAZARDOUS SUBSTANCES MANAGEMENT STANDARD”

5	射频同轴连接 RF CONNECTOR	SMP-KW 镀金NI AND AU	1
4	黑色带胶热缩管 BLACK HEAT SHRINKABLE TUBE WITH GLUE	/	15mm
3	同轴线缆 COAXIAL CABLE	1.37 黑色BLACK	450mm
2	黑色带胶热缩管 BLACK HEAT SHRINKABLE TUBE WITH GLUE	/	15mm
1	射频同轴连接器 RF CONNECTOR	SMPM-KW 镀金NI AND AU	1
NO.	DESCRIPTION	SPECIFICATIONS	QUANTITY

	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: Hong	DATE: 11/29'21	DWG.NO:	TITLE:	REV.:
	XX.± 0.40	XX.*± 2°	UNIT: mm	CHECK:	DATE:	PARTS NO.(INTENDED USE):	SMPM-KW_1.37(black)_SMP -KW-450MM	A
	X.± 0.25	X.*± 1°						SHEET:
	.X± 0.08	.X*± 0.5°	SIZE: A4	APPROVE:	DATE:	600-24908-01	818024908	1/1
.XX± 0.05								