


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN200140	FIRST EDITION	20-02-22	Beam	Martin	Ken
B	ECN203672	加长热缩管, 防呆槽EXTENDED HEAT SHRINKABLE TUBE, ANTI STAY GROOVE	20-12-09	Beam	Martin	Ken
C	ECN210205	增加镀层描述, 序号和重点管控ADD COATING DESCRIPTION, SERIAL NUMBER AND KEY CONTROL	21-05-27	Beam	Martin	Ken
C1	ECN210205	增加尺寸标注ADD DIMENSION	21-09-05	Beam	Martin	Ken

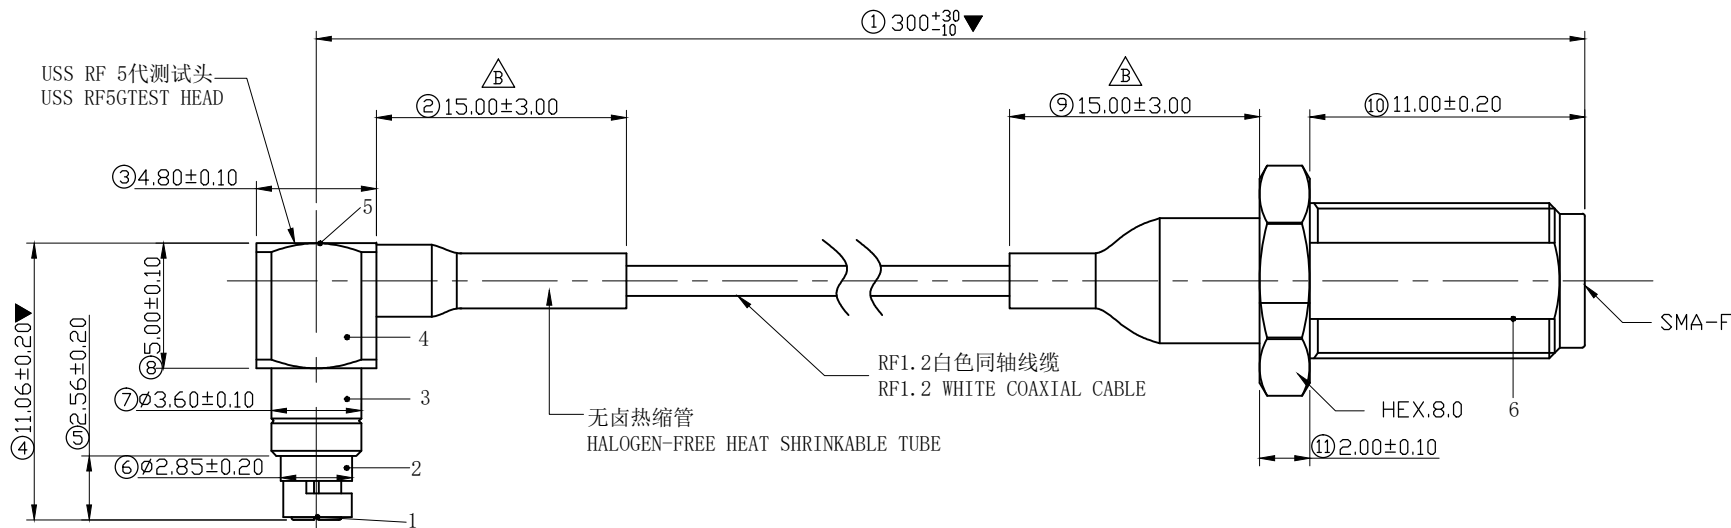

USS RF5代座子, P/N: ECT818002131  
USS RF 5G CONN, P/N: ECT818002131

技术参数 TECHNICAL PARAMETERS:

1. 电气特性 ELECTRICAL CHARACTERISTICS

特性阻抗 IMPEDANCE: 50 Ω  
频率范围 FREQUENCY: DC~6 GHz  
电压驻波比 VSWR: <1.5@0~3GHz; <1.6@3~6GHz;  
插入损耗 INSERTION LOSS: <2.0DB@0~3GHz, <3.0DB@3~6GHz  
耐压 WITHSTANDING VOLTAGE: > 300 V AC/1MIN

2. 机械特性 MECHANICAL PROPERTIES

机械耐久性 DURABILITY: > 2000 CYCLES  
探头插入力 INSERTION FORCE: <40N  
探头拔出力 PULL OUT FORCE: 4~30N

3. 环境特性 ENVIRONMENTAL FEATURES

工作温度范围 OPERATION TEMPERATURE RANGE: -40 °C ~ +85 °C  
湿度范围 OPERATION RELATIVE HUMIDITY: 95% R.H. MAX  
有害物质需符合 ECT 《QE-Q-19-001 环境有害物质管理基准》 管控标准。  
HAZARDOUS SUBSTANCES SHALL CONFORM TO ECT "QE-Q-19-001 ENVIRONMENTAL HAZARDOUS SUBSTANCES MANAGEMENT STANDARD"

NO.	DESCRIPTION	FINISH
6	SMA	镀金 GOLD PLATED
5	后盖 BACK COVER	镀金 GOLD PLATED
4	主体 MAIN BODY	镀金 GOLD PLATED
3	外导体 OUTER CONDUCTOR	镀金 GOLD PLATED
2	扣环 CLASP	钝化 PASSIVATION
1	探针 PROBE	镀金 GOLD PLATED

	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: Beam	DATE: 02/22'20	DWG.NO: 600-18163-01	TITLE: USS RF TYPE 5 TO SMA FOR RF1.2 CABLE	REV. C1
	XX±0.40	XX,°±2°	UNIT: mm	CHECK:	DATE:	PARTS NO.(INTENDED USE): 818018163		SHEET: 1/1
	X±0.25	X,°±1°						
	.X±0.08	.X°±0.5°	SIZE: A4	APPROVE:	DATE:			
.XX±0.05								