



文档密级：
商业秘密

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN234931	FIRST EDITION	04/02'24	Weijie	Martin	ken

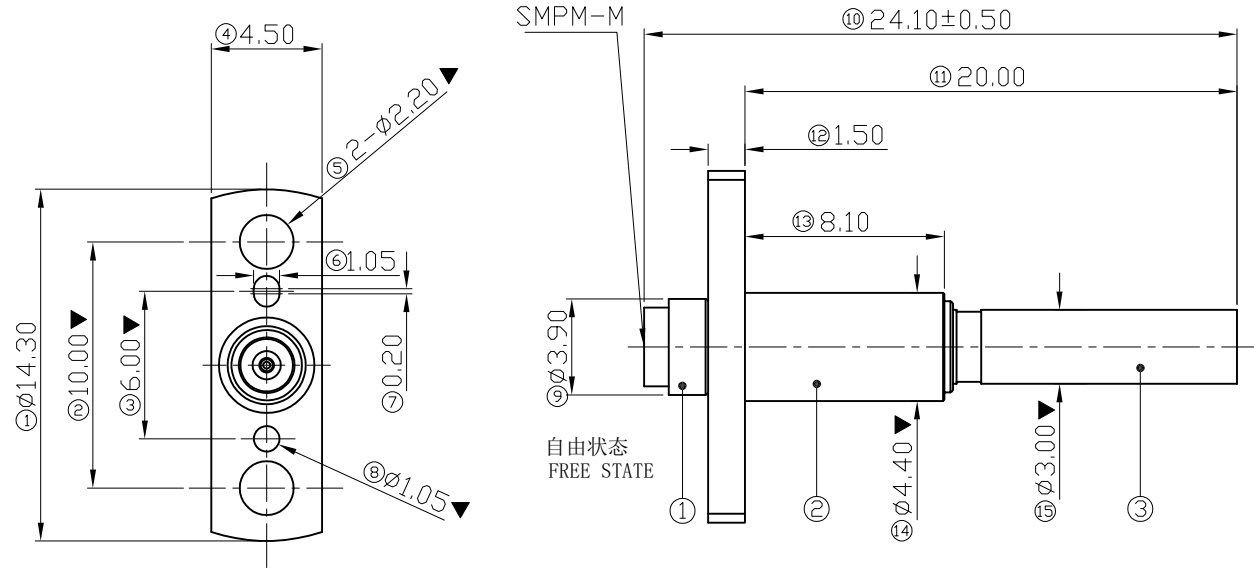


技术参数 TECHNICAL PARAMETERS:

- 电气特性 ELECTRICAL CHARACTERISTICS
 特性阻抗 CHARACTERISTIC IMPEDANCE: 50 Ω;
 频率范围 FREQUENCY RANGE: DC-6 GHz;
 电压驻波比 VSWR: <1.15@DC-3GHz; <1.35@3-6GHz;
 插入损耗 INSERTION LOSS: <0.3dB@DC-3GHz; <0.4dB@3-6GHz;
 介质耐压 DIELECTRIC WITHSTAND VOLTAGE: > 500 V AC/1MIN.
- 机械特性 MECHANICAL CHARACTERISTICS
 机械耐久性 MECHANICAL DURABILITY: > 20000 CYCLES .
- 环境特性 ENVIRONMENTAL CHARACTERISTICS
 工作温度范围 OPERATING TEMPERATURE RANGE: -40 °C ~ +85 °C;
 湿度范围 HUMIDITY RANGE: 15% ~ 85%;
 有害物质需符合 ECT 《QE-Q-19-001 环境有害物质管理基准》 管控标准。
 HARMFUL SUBSTANCES MEET ECT “《QE-Q-19-001 ENVIRONMENTAL HARMFUL SUBSTANCES MANAGEMENT STANDARS》” CONTROL SPECIFICATION.



参考3D视图
REFERENCE 3D VIEW

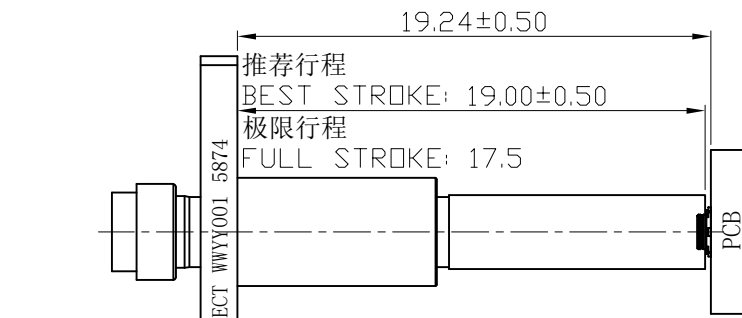

工作状态
WORKING CONDITION

成品激光刻字内容: ECT WY001 5874
 Ect代表深圳电连, WY001代表年周, 5874代表料号后4位。
 Laser lettering content of finished product: ECT WY001 5874
 Ect stands for Shenzhen electric company, wyy stands for 5874 represents the last four digits of P/N

3	外导体 OUTER CONDUCTOR	镀金 GOLD-PLATING
2	法兰 FLANGE	镀镍 NICKEL-PLATING
1	主体 MAIN BODY	镀金 GOLD-PLATING
NO.	DESCRIPTION	FINISH

	GENERAL TOLERANCE		SCALE:	DRAWN:	DATE:	DWG.NO:	TITLE:	REV.
	XX ± 0.50	XX ° ± 2°	1:1	Weijie	04/02'24			
	X ± 0.40	X ° ± 1°	UNIT:	CHECK:	DATE:	PARTS NO.(INTENDED USE):	SHEET:	
	.X ± 0.25	.X ° ± 0.5°	mm	APPROVE:	DATE:			818045874
	.XX ± 0.13		SIZE: A4					