

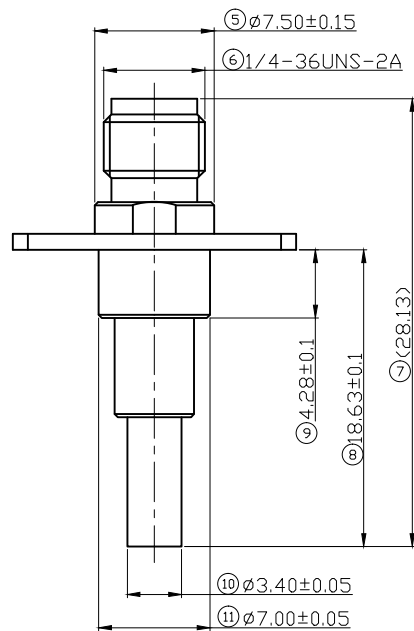



REV.	ECN NUBER	DESCRIPTION	DATE	Drawn	CHECKA	APPROVED
A	ECN201810	FIRST EDITION	03/24-21	June	Martin	Ken

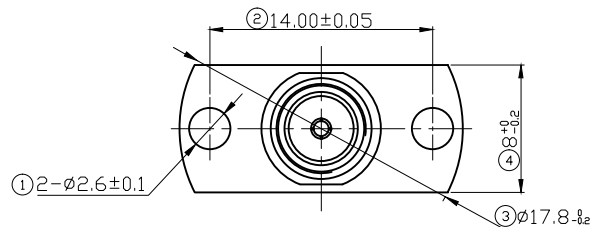

MATED CONDITION

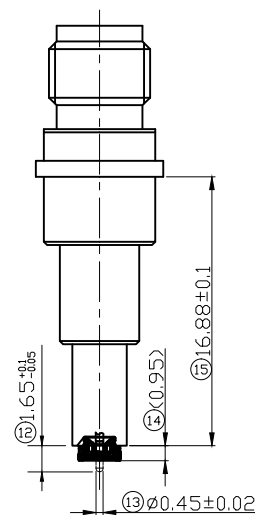


MATING ANGLE

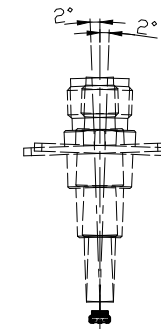

CONTACT PRESSURE

TOTAL 10 TO 12N

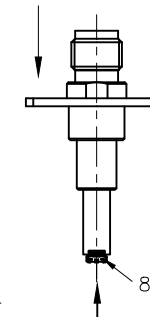

NOTE:

- 1.MATING ANGLE MUST BE LESS $\pm 2^\circ$ DEGREE.
- 2.THIS ADAPTOR MUST BE PUSHED ON THE RECEPTACLE WITH 10 TO 12N.

NOTES:

1. TECHNOLOGY PARAMETERS:
 - 1.1)NORMAL IMPEDANCE:50 OHM;
 - 1.2)FREQUENCY RANGE:DC~6GHZ;
 - 1.3)V. S. W. R. : 1.3 (DC:0~3GHZ) ;1.4 (3~6GHZ) ;
 - 1.4)INSERTION LOSS: 0.4DB MAX. (DC:0~3GHZ) 0.6DB MAX. (DC:3~6GHZ)
 - 1.5)DURATION :10000 CYCLES;
 - 1.6)WITHSTANDING VOLTAGE:300V AC/1MIN. ;
 - 1.7)TEMPERATION ALLOWED:-40~+85℃;
 - 1.8)HUMIDITY ALLOWED:15%~85%;
 - 1.9)HARMFUL SUBSTANCES MEET ECT “《QE-Q-19-001 ENVIRONMENTAL HARMFUL SUBSTANCES MANAGEMENT STANDARS》” CONTROL SPECIFICATION.



GENERAL TOLERANCE	
XX. ± 0.40	
X. ± 0.25	X* $\pm 2.0^\circ$
.X ± 0.13	.X* $\pm 1.0^\circ$
.XX ± 0.13	.XX* $\pm 0.5^\circ$

SCALE:	2:1
UNIT:	mm
SIZE:	A4

DRAWN	June
CHECK	
APPROVE	

DATE	20/07'13
DATE	
DATE	

DWT NO.	600-17735-01
PARTS NO.(INTENDED USE)	818017735

TITLE	Rev.
(CUSTOMER DRAWING) MINI RF II PLUG TO SMA JACK(TEST ADAPTOR)	A
	SHEET
	1/1