
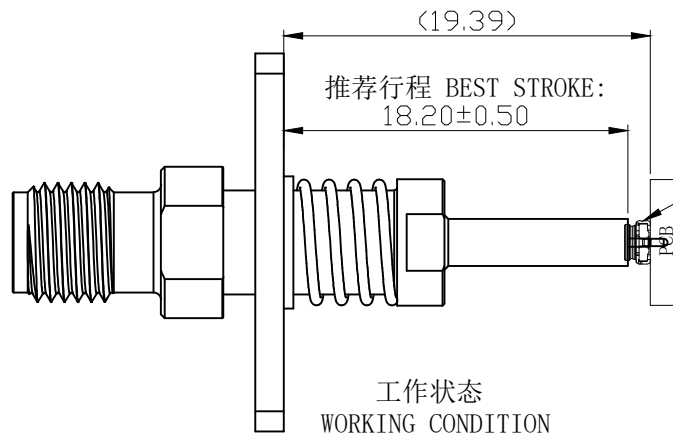
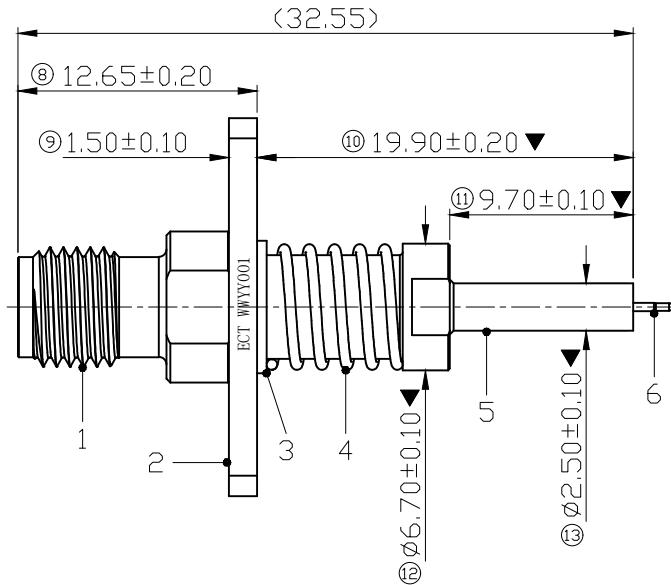


文档密级：
商业秘密

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
X1	ECN241856	FIRST EDITION	05/11'24	Weijie	Martin	ken

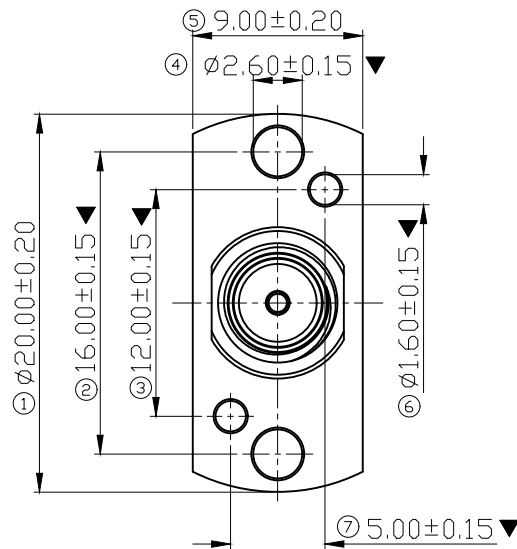

RECEPTACLE:
818051958/8180100055

技术参数TECHNICAL PARAMETERS:

1. 电气特性ELECTRICAL CHARACTERISTICS

特性阻抗CHARACTERISTIC IMPEDANCE: 50 Ω;

频率范围FREQUENCY RANGE: DC-6 GHZ;

电压驻波比VSWR: <1.60@DC-3GHZ;<1.70@3-6GHZ;

插入损耗INSERTION LOSS: <0.50DB@DC-3GHZ;<0.85DB@3-6GHZ;

介质耐压DIELECTRIC WITHSTAND VOLTAGE: > 300 V AC/1MIN.

2. 机械特性MECHANICAL CHARACTERISTICS

机械耐久性MECHANICAL DURABILITY: > 15000 CYCLES .

3. 环境特性ENVIRONMENTAL CHARACTERISTICS

工作温度范围OPERATING TEMPERATURE RANGE: -40 ℃~+85℃;

湿度范围HUMIDITY RANGE: 15%~85%;

有害物质需符合ECT《QE-Q-19-001环境有害物质管理基准》
管控标准。

HARMFUL SUBSTANCES MEET ECT“《QE-Q-19-001 ENVIRONMENTAL
HARMFUL SUBSTANCES MANAGEMENT STANDARS》” CONTROL
SPECIFICATION.

6	中心针 CENTER PIN	镀金 GOLD-PLATING
5	外导体 OUTER CONDUCTOR	镀金 GOLD-PLATING
4	弹簧 SPRING	钝化 PASSIVATION
3	绝缘子 INSULATOR	白色 WHITE
2	法兰 FLANGE	镀镍 NICKEL-PLATING
1	主体 MAIN BODY	镀镍 NICKEL-PLATING
NO.	DESCRIPTION	FINISH



ELECTRIC
CONNECTOR
TECHNOLOGY

GENERAL TOLERANCE	
XX± 0.50	XX.°± 2°
X± 0.40	X.°± 1°
.X± 0.25	.X°± 0.5°
.XX± 0.13	

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN:	Weijie
CHECK:	
APPROVE:	

DATE:	05/11'24
DATE:	
DATE:	

DWG.NO:	600-52946-01
PARTS NO.(INTENDED USE):	818052946

TITLE:	USS RF TEST ADAPTER 5GEN 14.3*4.4*24
--------	---

REV.	X1
SHEET:	1/1