
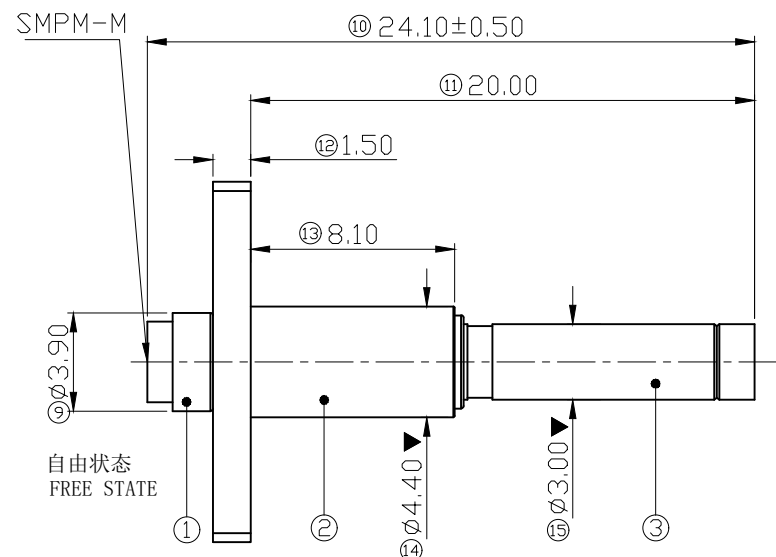



文档密级：  
商业秘密

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN234931	FIRST EDITION	04/02'24	Weijie	Martin	ken

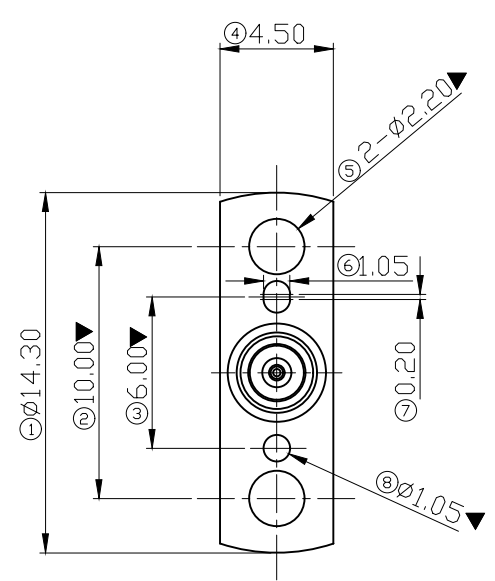


技术参数 TECHNICAL PARAMETERS:

- 电气特性 ELECTRICAL CHARACTERISTICS  
 特性阻抗 CHARACTERISTIC IMPEDANCE: 50 Ω;  
 频率范围 FREQUENCY RANGE: DC-6 GHz;  
 电压驻波比 VSWR: <1.15@DC-3GHz;<1.35@3-6GHz;  
 插入损耗 INSERTION LOSS: <0.3DB@DC-3GHz;<0.4DB@3-6GHz;  
 介质耐压 DIELECTRIC WITHSTAND VOLTAGE: > 500 V AC/1MIN.
- 机械特性 MECHANICAL CHARACTERISTICS  
 机械耐久性 MECHANICAL DURABILITY: > 20000 CYCLES .
- 环境特性 ENVIRONMENTAL CHARACTERISTICS  
 工作温度范围 OPERATING TEMPERATURE RANGE: -40 °C~+85°C;  
 湿度范围 HUMIDITY RANGE: 15%~85%;  
 有害物质需符合ECT《QE-Q-19-001环境有害物质管理基准》管控标准。  
 HARMFUL SUBSTANCES MEET ECT“《QE-Q-19-001 ENVIRONMENTAL HARMFUL SUBSTANCES MANAGEMENT STANDARS》” CONTROL SPECIFICATION.



参考3D视图  
REFERENCE 3D VIEW

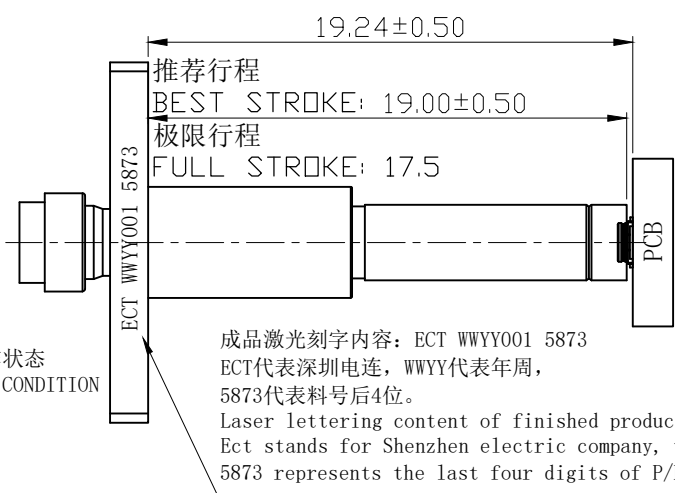

成品激光刻字内容: ECT WWYY001 5873  
 ECT代表深圳电连, WWYY代表年周, 5873代表料号后4位。  
 Laser lettering content of finished product: ECT WWYY001 5873  
 Ect stands for Shenzhen electric company, wyy stands 5873 represents the last four digits of P/N

3	外导体 OUTER CONDUCTOR	镀金 GOLD-PLATING
2	法兰 FLANGE	镀镍 NICKEL-PLATING
1	主体 MAIN BODY	镀金 GOLD-PLATING
NO.	DESCRIPTION	FINISH

ELECTRIC CONNECTOR TECHNOLOGY	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: Weijie	DATE: 04/02'24	DWG.NO: 600-45873-01	TITLE: USS RF TEST ADAPTER 4GEN 14.3*4.4*24	REV. A
	XX±0.50	XX°±2°	UNIT: mm	CHECK:	DATE:	PARTS NO.(INTENDED USE): 818045873		SHEET: 1/1
	X±0.40	X°±1°	SIZE: A4	APPROVE:	DATE:			
	.X±0.25	.X°±0.5°						
.XX±0.13								