


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN202151	FIRST EDITION	20-12-02	Hu	Martin	Ken

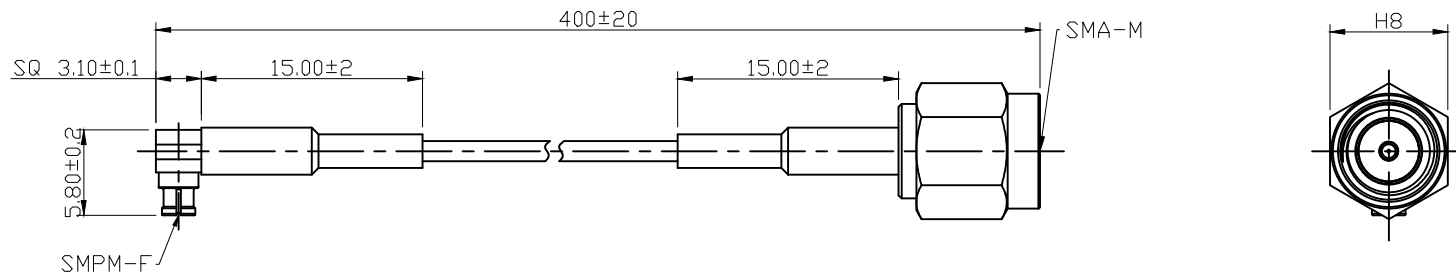

技术参数 TECHNICAL PARAMETER:


1. 电气特性 ELECTRICAL CHARACTERISTICS

特性阻抗 CHARACTERISTIC IMPEDANCE: 50 Ω  
 工作频率 WORKING FREQUENCY: DC-8 GHz  
 电压驻波比 WORKING FREQUENCY: <1.4@DC-6GHz; <1.5@6-8GHz;  
 插入损耗 INSERTION LOSS: < 2.5DB@DC-6GHz; <2.9DB@6-8GHz;  
 介质耐压 MEDIUM WITHSTAND VOLTAGE: > 500 V AC/1MIN

2. 环境特性 ENVIRONMENTAL CHARACTERISTICS

工作温度范围 TEMPERATURE RANGE: -40 °C ~ +85°C  
 湿度范围 HUMIDITY RANGE: 15%~85%.

3. 有害物质需符合 ECT 《QE-Q-19-001 环境有害物质管理基准》 管控标准。  
 HARMFUL SUBSTANCES MEET ECT “《QE-Q-19-001 ENVIRONMENTAL HARMFUL SUBSTANCES MANAGEMENT STANDARDS》” CONTROL SPECIFICATION.



参考3D视图  
REFERENCE 3D VIEW



ELECTRIC  
CONNECTOR  
TECHNOLOGY

GENERAL TOLERANCE	
XX, ± 0.40	XX.° ± 2°
X, ± 0.25	X.° ± 1°
.X ± 0.08	.X° ± 0.5°
.XX ± 0.05	

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN:	HU	DATE:	12/02'20
CHECK:		DATE:	
APPROVE:		DATE:	

DWG.NO:	600-21698-01
PARTS NO.(INTENDED USE):	818021698

TITLE:	SMPM CABLE 5.8*5.8*3.1Φ1.37, L400, SMA-M
--------	---

REV.	A
SHEET:	1/1