
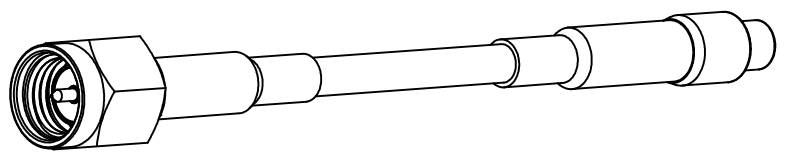


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN212497	FIRST EDITION	04/08'22	Huningwei	Martin	ken

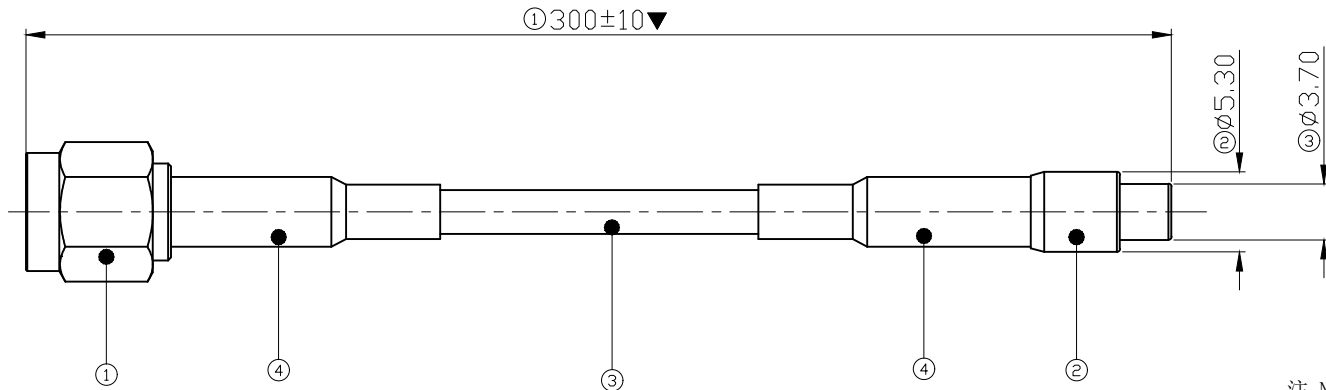

参考3D视图
REFERENCE 3D VIEW

注 NOTES:

1. 电气参数 ELECTRICAL PARAMETERS:
 - 1.1 特性阻抗 CHARACTERISTIC IMPEDANCE: 50 Ω;
 - 1.2 工作频率 WORKING FREQUENCY: 0~6GHZ ;
 - 1.3 电压驻波比 VSWR: <1.5@DC-3GHz;<1.6@3-6GHz; ;
 - 1.4 插入损耗 INSERTION LOSS:<1.6dB@DC-3GHz;<2.45dB@3-6GHz ;
 - 1.5 介质耐压 MEDIUM WITHSTAND VOLTAGE: 500V ;
2. 机械寿命 DURABILITY:>500CYCLES;
3. 环境参数 ENVIRONMENTAL PARAMETERS:
 - 3.1 温度范围 TEMPERATURE RANGE: -40~+85℃;
 - 3.2 湿度范围 HUMIDITY RANGE: 15%~85%;
 - 3.3 有害物质需符合ECT《QE-Q-19-001环境有害物质管理基准》管控标准。
 - 3.3 HARMFUL SUBSTANCES MEET ECT “《QE-Q-19-001 ENVIRONMENTAL HARMFUL SUBSTANCES MANAGEMENT STANDARS》” CONTROL SPECIFICATION.

4	热缩套管 HEATSHINK SLEEVE	黑色 BLACK
3	同轴线 COAXIAL CABLE	黑色 BLACK
2	SCS RF 2.5	镀镍 NICKEL PLATING
1	SMA-M	镀金 GOLD-PLATING
序号 NO	描述 DESCRIBE	表面处理 SURFACE TREATMENT

	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: Huningwei	DATE: 07/24'21	DWG.NO: 600-23116-01	TITLE: SCSRF TEST CABLE RG316P-SC L300 SMA-M	REV. A
	XX± 0.40	XX.°± 2°	UNIT: mm	CHECK:	DATE:	PARTS NO.(INTENDED USE): 818023116	SHEET: 1/1	
	X± 0.25	X.°± 1°	SIZE: A4	APPROVE:	DATE:			
	.X± 0.08	.X°± 0.5°						
.XX± 0.05								