
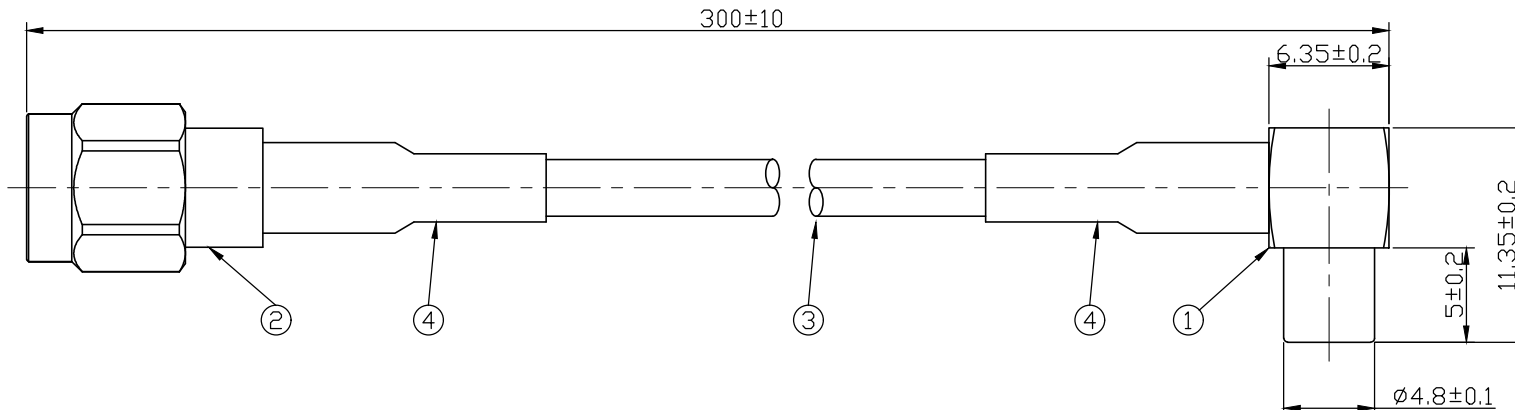


文档密级：
商业秘密

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN152041	FIRST RELEASE	12/10'15	WEN	KEVIN	KEVIN



注 NOTE:

1. 电气参数 ELECTRICAL PARAMETERS:

- 1.1 工作频率 WORKING FREQUENCY: 0~3GHZ
- 1.2 电压驻波比 VOLTAGE STANDING WAVE RATIO: 1.5 MAX.
- 1.3 插入损耗 INSERTION LOSS: 1.6 dB MAX.
- 1.4 介质耐压 MEDIUM WITHSTAND PRESSURE: 60V
- 1.5 绝缘阻抗 INSULATION IMPEDANCE: 100MΩ
- 1.6 内导体接触阻抗 INTERNAL CONDUCTOR CONTACT IMPEDANCE: 100 mΩ
- 1.7 外导体接触阻抗 EXTERNAL CONDUCTOR CONTACT IMPEDANCE: 100 mΩ

2. 机械参数 MECHANICAL PARAMETERS:

- 2.1 机械耐久性 MECHANICAL DURABILITY: 500 Cycles
- 2.2 线材轴向保持力 AXIAL RETAINING FORCE OF THE WIRE ROD: 30N Min.

3. 环境参数 ENVIRONMENTAL PARAMETERS:

- 3.1 温度范围 TEMPERATURE RANGE: -40°C ~+ 80°C

4	套管 CASING	2	热缩套管, 黑色 HEAT SHRINK TUBING, BLACK
3	线材 WIRE MATERIAL	1	1.5D-2V 同轴线, 黑色外被 OD:3mm 1.5D-2V COAXIAL CABLE, BLACK OUTER SHEATH, OUTER DIAMETER: 3MM
2	连接器 CONNECTOR 2	1	SMA 公座, 黄铜 镀金 SMA PUBLIC MEETING, BRASS PLATED WITH GOLD
1	连接器 CONNECTOR 1	1	SCS 3.4 公座, 黄铜 镀镍 SCS 3.4 PUBLIC BUILDING, BRASS COATED WITH NICKEL

ITEM	PART NAME	Q'TY	MATERIAL / FINISH
DWG.NO:			TITLE:
600-0496-01			(CUSTOMER DRAWING)
PARTS NO.(INTENDED USE):			SCS 3.4 射频电缆 (配818000307)
818000496			REV. A
			SHEET: 1/1



GENERAL TOLERANCE	
XX± 0.40	XX.°± 3°
X± 0.25	X.°± 2°
.X± 0.20	.X°± 1°
.XX± 0.13	

SCALE:	2:1
UNIT:	mm
SIZE:	A4

DRAWN:	WEN	DATE:	12/10'15
CHECK:		DATE:	
APPROVE:		DATE:	