



know more...



Stock Code:
300679.SZ

Changing the life with science and technology
Driving the future with Connectivity

ECTCONN[®]

HIGH SPEED CABLE CONNECTOR

CATALOGUE




No. 171 Changfeng Road, Yutang Street, Guangming District, Shenzhen, China
Fax: 0755 - 81735699 Tel.: 0755 - 81735688
Email: salescn@ectsz.com Website: www.ectsz.com

Electric Connector Technology Co., Ltd

2025

Provide High Speed Cable Connector
and its Solution for Global Customers

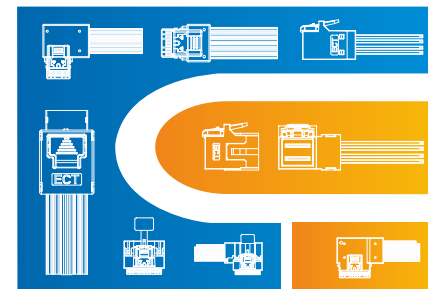

Provide High Speed Cable Connector
and its Solution for Global Customers

Changing the life with science and technology
Driving the future with Connectivity

ABOUT ECT

Electric Connector Technology Co., Ltd. (ECT) was established in 2006 in Shenzhen China with a registered capital of 4.23 million RMB. The company has become public in 2017 at Shenzhen Stock Exchange Market, stock code 300679.SZ. Up to the beginning of 2025, we have 28 branches globally including Taiwan, Hongkong, South Korea, Japan, Thailand, Vietnam and US etc. with more than 7,000 employees worldwide.

After years of dedicated development, ECT has become a professional manufacturer in the fields of RF connector, automotive connector, antenna and electromagnetic shielding products, and our products are widely used in consumer electronics, IoT, communication equipments and automotive electronics and other fields. What's more important is that ECT has complete capability to design and deliver RF products with large volume from component to system level, and we are always committed to providing customers with one-stop RF solutions. ECT's RF connector and automobile high-speed connector have an important position and big market share in China, and with significant amount in global market.

ECT has passed ISO9001, ISO14001, IATF16949, ISO45001, ISO17025, Qc080000, UL, ISO27001, ISO17025, RBA VAP, ISO50001, ISO14064-1, AEO certification and the CNAS qualification audit and conformity assessment, we have excellent qualifications and will be dedicated to provide you with excellent service.

Provide High Speed Cable Connector
and its Solution for Global Customers



Year 2006

Founded

28

Global Branches

4.23 Million CNY

Registering Capital

7000+

Employees Worldwide



ECT Worldwide

Headquarters

- No. 171 Changfeng Road, Yutang Street, Guangming District, Shenzhen China
- www.ectsz.com
- salescn@ectsz.com

Manufacturing Locations

- China (Shenzhen, Dongguan, Suzhou, Nanjing, Hefei, Wuhu, Chongqing)
- Thailand (Samut Prakan)
- Vietnam (Bac Ninh)

R&D Center

- China (Shenzhen, Shanghai, Nanjing)
- United States (San Diego, Bay Area/San Jose)

Branches

- China (Shenzhen, Dongguan, Suzhou, Shanghai, Nanjing, Hefei, Xi'an, Hongkong, Wuhu, Chongqing)
- Thailand (Samut Prakan)
- Vietnam (Bac Ninh)

Office

- China (Chengdu, Xi'an, Beijing, Taipei, Suzhou)
- South Korea (Seoul)
- Japan (Yokohama)
- United States (San Diego, Bay Area/San Jose)
- Singapore (Launingda)




Table of Content

01 HD MiniSAS Series	04
01.1 HD MiniSAS Series	
02 MiniSAS 4I Series	05
02.1 MiniSAS 4I Series	
03 Oculink 4I Series	06
03.1 Oculink 4I Series	
04 SlimSAS 4I & 8I Series	07-08
04.1 SlimSAS 4I & 8I Series	
05 SlimSAS 4I & 8I (Anti-skew) Series	09-10
05.1 SlimSAS 4I & 8I (Anti-skew) Series	
06 SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series	11-12
06.1 SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series	
07 Omni Edge ASM 8I W/PULL TAB Series	13
07.1 Omni Edge ASM 8I W/PULL TAB Series	
08 GNE Z Series	13-15
08.1 GNE Z Series	
09 Mini Cool Edge IO(MCIO) Series	16-21
09.1 Mini Cool Edge IO(MCIO) Series	
10 Multi Trak Series	22-25
10.1 Multi Trak Series	
11 DA CEM Series	26
11.1 DA CEM Series	

HD MiniSAS Series



01.1 HD MiniSAS Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7415950004	HD MiniSAS 4I STR 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	26
		100Ω	7415950001	HD MiniSAS 4I STR 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	26
2		85Ω	7415950007	HD MiniSAS 4I RA 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	26
		100Ω	7415950006	HD MiniSAS 4I RA 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	26
3		85Ω	7415950009	HD MiniSAS 4I Right SE 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	26
		100Ω	7415950008	HD MiniSAS 4I Right SE 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	26
4		85Ω	7415950011	HD MiniSAS 4I Left SE 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	27
		100Ω	7415950010	HD MiniSAS 4I Left SE 36Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	27
5		85Ω	7421090001	HD MiniSAS 8I STR 72Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	27
		100Ω	7421090002	HD MiniSAS 8I STR 72Pos	1.1 Series: HD MiniSAS 1.2 Pitch: 0.75mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	27

MiniSAS 4I Series



02.1 MiniSAS 4I Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		100Ω	7217034101	MiniSAS 4I STR 36Pos	1.1 Series: MiniSAS 1.2 Pitch: 0.8mm 1.3 Impedance: 100Ω 1.4 Wire Gauge: 34AWG-30AWG	29
2		100Ω	7417063001	MiniSAS 4I RA 36Pos	1.1 Series: MiniSAS 1.2 Pitch: 0.8mm 1.3 Impedance: 100Ω 1.4 Wire Gauge: 34AWG-30AWG	29

Oculink 4I Series




03.1 Oculink 4I Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7417066002	Oculink 4I STR 42Pos	1.1 Series: Oculink 1.2 Pitch: 0.5mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	31
		100Ω	7417066001	Oculink 4I STR 42Pos	1.1 Series: Oculink 1.2 Pitch: 0.5mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	31
2		85Ω	7417066004	Oculink 4I RA 42Pos	1.1 Series: Oculink 1.2 Pitch: 0.5mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	31
		100Ω	7417066003	Oculink 4I RA 42Pos	1.1 Series: Oculink 1.2 Pitch: 0.5mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	31



04.1 SlimSAS 4I & 8I Series


Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7415149001	SlimSAS 4I STR 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	33
		100Ω	7417075001	SlimSAS 4I STR 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	33
2		85Ω	7415149003	SlimSAS 4I RA 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	33
		100Ω	7415149004	SlimSAS 4I RA 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	33
3		85Ω	7415949003	SlimSAS 4I Right SE 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	33
		100Ω	7415149002	SlimSAS 4I Right SE 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	33
4		85Ω	7415949002	SlimSAS 4I Left SE 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	34
		100Ω	7415149005	SlimSAS 4I Left SE 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	34

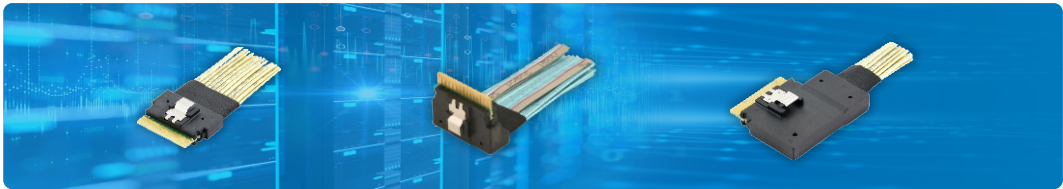

04.1 SlimSAS 4I & 8I Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
5		85Ω	7415148001	SlimSAS 8I STR 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	34
		100Ω	7415148007	SlimSAS 8I STR 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	34
6		85Ω	7415148008	SlimSAS 8I STR 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	34
		100Ω	7415148009	SlimSAS 8I STR 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	34
7		85Ω	7415148004	SlimSAS 8I Right SE 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	35
		100Ω	7415148011	SlimSAS 8I Right SE 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	35
8		85Ω	7415148005	SlimSAS 8I Left SE 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	35
		100Ω	7415148010	SlimSAS 8I Left SE 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	35


SlimSAS 4I & 8I (Anti-skew) Series



05.1 SlimSAS 4I & 8I (Anti-skew) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7415148012	SlimSAS 4I STR Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	37
		100Ω	7415148013	SlimSAS 4I STR Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	37
2		85Ω	7415148014	SlimSAS 4I RA Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	37
		100Ω	7415148015	SlimSAS 4I RA Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	37
3		85Ω	7415148018	SlimSAS 4I Right SE Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	37
		100Ω	7415148019	SlimSAS 4I Right SE Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	37
4		85Ω	7415148016	SlimSAS 4I Left SE Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	38
		100Ω	7415148017	SlimSAS 4I Left SE Anti-skew 38Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	38


SlimSAS 4I & 8I (Anti-skew) Series



05.1 SlimSAS 4I & 8I (Anti-skew) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
5		85Ω	7415148003	SlimSAS 8I STR Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	38
		100Ω	7415148020	SlimSAS 8I STR Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	38
6		85Ω	7415148021	SlimSAS 8I RA Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	38
		100Ω	7415148002	SlimSAS 8I RA Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	38
7		85Ω	7415148024	SlimSAS 8I Right SE Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	39
		100Ω	7415148025	SlimSAS 8I Right SE Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	39
8		85Ω	7415148022	SlimSAS 8I Left SE Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	39
		100Ω	7415148023	SlimSAS 8I Left SE Anti-skew 74Pos	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	39


SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series



06.1 SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7426369002	SlimSAS 4I STR Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	41
		100Ω	7426369003	SlimSAS 4I STR Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	41
2		85Ω	7429078002	SlimSAS 4I RA Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	41
		100Ω	7429078003	SlimSAS 4I RA Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	41
3		85Ω	7429078004	SlimSAS 4I Right SE Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	41
		100Ω	7429078005	SlimSAS 4I Right SE Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	41
4		85Ω	7430731002	SlimSAS 4I Left SE Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	42
		100Ω	7430731003	SlimSAS 4I Left SE Anti-skew 38Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	42

SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series



06.1 SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
5		85Ω	7425813001	SlimSAS 8I STR Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	42
		100Ω	7430706001	SlimSAS 8I STR Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	42
6		85Ω	7429553001	SlimSAS 8I RA Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	42
		100Ω	7429553002	SlimSAS 8I RA Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	42
7		85Ω	7429553003	SlimSAS 8I Right SE Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	43
		100Ω	7429553004	SlimSAS 8I Right SE Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	43
8		85Ω	7429553005	SlimSAS 8I Left SE Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	43
		100Ω	7429553006	SlimSAS 8I Left SE Anti-skew 74Pos W/PULL TAB	1.1 Series: SlimSAS 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&100Ω 1.4 Wire Gauge: 34AWG-30AWG	43

Omni Edge ASM 8I W/PULL TAB Series



07.1 Omni Edge ASM 8I W/PULL TAB Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7433609001	Omni Edge ASM STR 74Pos W/PULL TAB	1.1 Series: Omni Edge ASM 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	45
2		85Ω	7433609002	Omni Edge ASM RA 74Pos W/PULL TAB	1.1 Series: Omni Edge ASM 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	45

GNE Z Series



08.1 GNE Z Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7422934001	GEN Z 1C (4I 56Pos) STR	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	47
2		85Ω	7422934002	GEN Z 2C (8I 84Pos) STR	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	47
3		85Ω	7422934003	LP GEN Z 1C (4I 56Pos) STR W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	47
4		85Ω	7422934004	LP GEN Z 1C (4I 56Pos) RA W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	48
5		85Ω	7422934005	LP GEN Z 2C (8I 84Pos) STR W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	48

☐☐☐ GNE Z Series



08.1 GNE Z Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
6		85Ω	7422934006	LP GEN Z 2C (8I 84Pos) RA W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	48
7		85Ω	7422934007	LP GEN Z 4C (16I 140Pos) STR W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	49
8		85Ω	7422934008	LP GEN Z 4C (16I 140Pos) RA W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	49
9		85Ω	7422934009	GEN Z 4C+ (168POS) STR W/PULL TAB	1.1 Series: GEN Z 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	49


☐☐☐ Mini Cool Edge IO(MCIO) Series



09.1 Mini Cool Edge IO(MCIO) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7430143002	MCIO 12I STR 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	51
		95Ω	7430143003	MCIO 12I STR 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	51
2		85Ω	7430147001	MCIO 12I STR 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	51
		95Ω	7430147002	MCIO 12I STR 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	51
3		85Ω	7431454002	MCIO 12I RA 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	51
		95Ω	7431454004	MCIO 12I RA 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	51
4		85Ω	7431454001	MCIO 12I RA 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	52
		95Ω	7431454003	MCIO 12I RA 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	52

Mini Cool Edge IO(MCIO) Series



09.1 Mini Cool Edge IO(MCIO) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
5		85Ω	7435834001	MCIO 4I STR 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	52
		95Ω	7435834002	MCIO 4I STR 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	52
6		85Ω	7435835001	MCIO 4I STR 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	52
		95Ω	7435835002	MCIO 4I STR 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	52
7		85Ω	7435836001	MCIO 4I R/A 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	53
		95Ω	7435836002	MCIO 4I R/A 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	53
8		85Ω	7435837001	MCIO 4I R/A 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	53
		95Ω	7435837002	MCIO 4I R/A 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	53

Mini Cool Edge IO(MCIO) Series



09.1 Mini Cool Edge IO(MCIO) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
9		85Ω	7435838001	MCIO 4I R/E 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	53
		95Ω	7435838002	MCIO 4I R/E 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	53
10		85Ω	7435839001	MCIO 4I R/E 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	54
		95Ω	7435839002	MCIO 4I R/E 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	54
11		85Ω	7435840001	MCIO 4I L/E 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	54
		95Ω	7435840002	MCIO 4I L/E 38Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	54
12		85Ω	7435841001	MCIO 4I L/E 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	54
		95Ω	7435841002	MCIO 4I L/E 38Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	54

Mini Cool Edge IO(MCIO) Series



09.1 Mini Cool Edge IO(MCIO) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
13		85Ω	7435842001	MCIO 12I R/E 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	55
		95Ω	7435842002	MCIO 12I R/E 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	55
14		85Ω	7435843001	MCIO 12I R/E 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	55
		95Ω	7435843002	MCIO 12I R/E 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	55
15		85Ω	7435844001	MCIO 12I L/E 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	55
		95Ω	7435844003	MCIO 12I L/E 74Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	55
16		85Ω	7435845001	MCIO 12I L/E 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	56
		95Ω	7435845002	MCIO 12I L/E 74Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	56


Mini Cool Edge IO(MCIO) Series



09.1 Mini Cool Edge IO(MCIO) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
17		85Ω	7435846001	MCIO 16I STR 124Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	56
		95Ω	7435846002	MCIO 16I STR 124Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	56
18		85Ω	7435847001	MCIO 16I STR 124Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	56
		95Ω	7435847002	MCIO 16I STR 124Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	56
19		85Ω	7435848001	MCIO 16I R/A 124Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	57
		95Ω	7435848002	MCIO 16I R/A 124Pos W/PULL TAB	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	57
20		85Ω	7435849001	MCIO 16I R/A 124Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	57
		95Ω	7435849002	MCIO 16I R/A 124Pos	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω&95Ω 1.4 Wire Gauge: 34AWG-30AWG	57

Mini Cool Edge IO(MCIO) Series



09.1 Mini Cool Edge IO(MCIO) Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
21		85Ω	7435849003	MCIO LE 74POS W/PULL TAB (Anti-skew curved wire)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	57
22		85Ω	7435849004	MCIO LE 74POS W/PULL TAB (Anti-skew弯板)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	58
23		85Ω	7435849005	MCIO RA 74POS W/PULL TAB (Anti-skew)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	58
24		85Ω	7435849006	MCIO RE 74POS W/PULL TAB (Anti-skew弯板)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	58
25		85Ω	7435849007	MCIO RE 74POS W/PULL TAB (Anti-skew curved wire)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	59
26		85Ω	7435849008	MCIO RA 38POS W/PULL TAB (Anti-skew)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	59
27		85Ω	7435849009	MCIO RA 124POS W/PULL TAB (Anti-skew)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	59
28		85Ω	74358490010	MCIO STR 124POS W/PULL TAB (Anti-skew)	1.1 Series: Mini Cool Edge IO 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	60

Multi Trak Series



10.1 Multi Trak Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7450115001	MULTI-TRAK 16X RAD	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	62
2		85Ω	7450116001	MULTI-TRAK 16X PM VT	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	62
3		85Ω	7450115002	MULTI-TRAK 16X RRAD	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	62
4		85Ω	7450116002	MULTI-TRAK 16X PM RVT	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	63
5		85Ω	7444066001	MULTI-TRAK 16X RVT	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	63
6		85Ω	7450118010	Multi Trak POWER 21A STR	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	63
7		85Ω	7450118019	Multi Trak 8X 34A STR	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	64
8		85Ω	7450118023	Multi Trak 8X 21A STR	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	64


Multi Trak Series



10.1 Multi Trak Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
9		85Ω	7450118024	Multi Trak 8X 21A RA	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	64
10		85Ω	7450118025	Multi Trak 8X 21A RRA	1.1 Series:multi-trak 16X 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	65

DA CEM Series



11.1 DA CEM Series

Item	Image	Impedance	ECT P/N	Description	Remark	Page
1		85Ω	7450116001	DA CEM	1.1 Series:DA CEM 1.2 Pitch: 0.6mm 1.3 Impedance: 85Ω 1.4 Wire Gauge: 34AWG-30AWG	67

01


HD MiniSAS Series



HD MiniSAS 4I STR 36Pos

P/N: 7415950004/85Ω P/N: 7415950001/100Ω ● Outline Dimensions

● Technology Parameters




- 1.1 Series: HD MiniSAS
- 1.2 Pitch: 0.75mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

HD MiniSAS 4I RA 36Pos

P/N: 7415950007/85Ω P/N: 7415950006/100Ω ● Outline Dimensions

● Technology Parameters




- 1.1 Series: HD MiniSAS
- 1.2 Pitch: 0.75mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

HD MiniSAS 4I Right SE 36Pos

P/N: 7415950009/85Ω P/N: 7415950008/100Ω ● Outline Dimensions

● Technology Parameters





- 1.1 Series: HD MiniSAS
- 1.2 Pitch: 0.75mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

HD MiniSAS 4I Left SE 36Pos

P/N: 7415950011/85Ω P/N: 7415950010/100Ω

● Outline Dimensions

● Technology Parameters

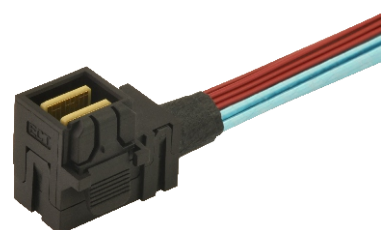


- 1.1 Series: HD MiniSAS
- 1.2 Pitch: 0.75mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

HD MiniSAS 8I STR 72Pos

P/N: 7415950007/85Ω P/N: 7415950006/100Ω

● Outline Dimensions


● Technology Parameters



- 1.1 Series: HD MiniSAS
- 1.2 Pitch: 0.75mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

02

MiniSAS 4I Series




MiniSAS 4I STR 36Pos

P/N: 7217034101/100Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: MiniSAS
- 1.2 Pitch: 0.8mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MiniSAS 4I RA 36Pos

P/N: 7417063001/100Ω

● Outline Dimensions


● Technology Parameters



- 1.1 Series: MiniSAS
- 1.2 Pitch: 0.8mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG


03

Oculink 4I Series



Oculink 4I STR 42Pos



P/N: 7417066002/85Ω P/N: 7417066001/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Oculink
- 1.2 Pitch: 0.5mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Oculink 4I RA 42Pos

P/N: 7417066004/85Ω P/N: 7417066003/100Ω ● Outline Dimensions ● Technology Parameters

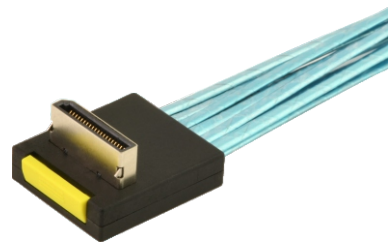

- 1.1 Series: Oculink
- 1.2 Pitch: 0.5mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG



04

SlimSAS 4I & 8I Series



SlimSAS 4I STR 38Pos



P/N: 7415149001/85Ω P/N: 7417075001/100Ω ● Outline Dimensions ● Technology Parameters

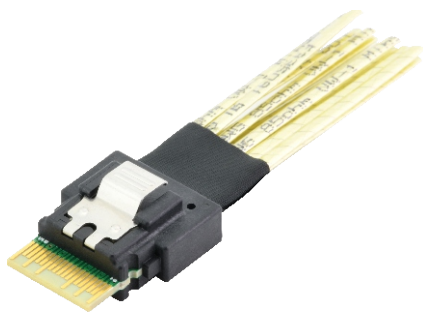

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I RA 38Pos


P/N: 7415149003/85Ω P/N: 7415149004/100Ω ● Outline Dimensions ● Technology Parameters

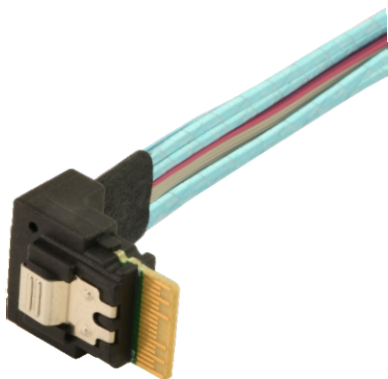

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I Right SE 38Pos



P/N: 7415949003/85Ω P/N: 7415149002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I Left SE 38Pos



P/N: 7415949002/85Ω P/N: 7415149005/100Ω ● Outline Dimensions ● Technology Parameters

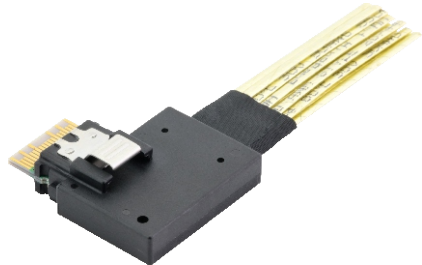

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I STR 74Pos



P/N: 7415148001/85Ω P/N: 7415148007/100Ω ● Outline Dimensions ● Technology Parameters

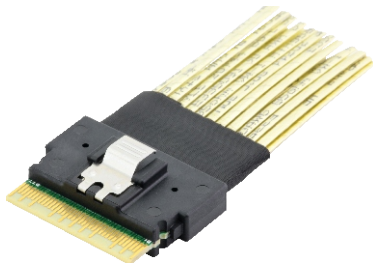

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I RA 74Pos


P/N: 7415148008/85Ω P/N: 7415148009/100Ω ● Outline Dimensions ● Technology Parameters

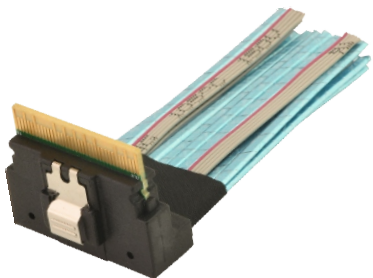

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I Right SE 74Pos


P/N: 7415148004/85Ω P/N: 7415148011/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I Left SE 74Pos

P/N: 7415148005/85Ω P/N: 7415148010/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG



05

SlimSAS 41&8I(Anti-skew) Series



SlimSAS 4I STR Anti-skew 38Pos



P/N: 7415148012/85Ω P/N: 7415148013/100Ω ● Outline Dimensions ● Technology Parameters

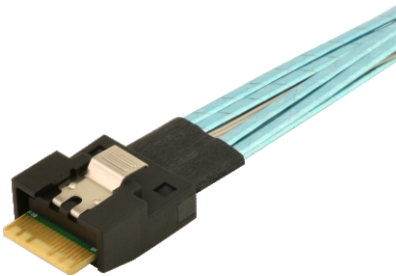

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I RA Anti-skew 38Pos



P/N: 7415148014/85Ω P/N: 7415148015/100Ω ● Outline Dimensions ● Technology Parameters

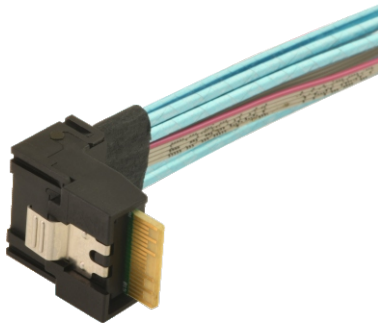

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I Right SE Anti-skew 38Pos



P/N: 7415148018/85Ω P/N: 7415148019/100Ω ● Outline Dimensions ● Technology Parameters

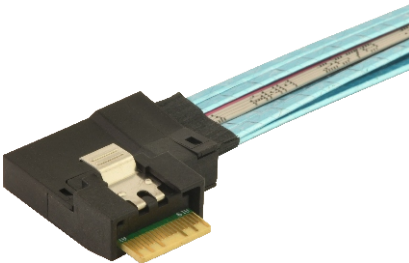

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I Left SE Anti-skew 38Pos


P/N: 7415148016/85Ω P/N: 7415148017/100Ω ● Outline Dimensions ● Technology Parameters

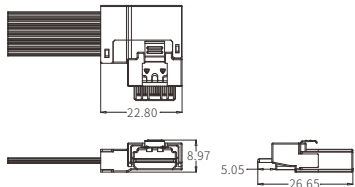

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I STR Anti-skew 74Pos



P/N: 7415148003/85Ω P/N: 7415148020/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I RA Anti-skew 74Pos

P/N: 7415148021/85Ω P/N: 7415148002/100Ω ● Outline Dimensions ● Technology Parameters

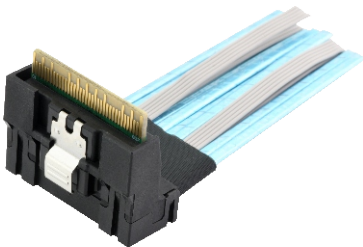



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I Right SE Anti-skew 74Pos

P/N: 7415148024/85Ω P/N: 7415148025/100Ω

● Outline Dimensions

● Technology Parameters

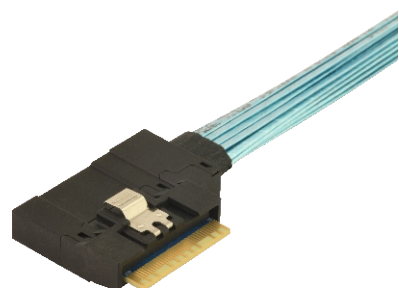



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I Left SE Anti-skew 74Pos

P/N: 7415148022/85Ω P/N: 7415148023/100Ω

● Outline Dimensions



● Technology Parameters

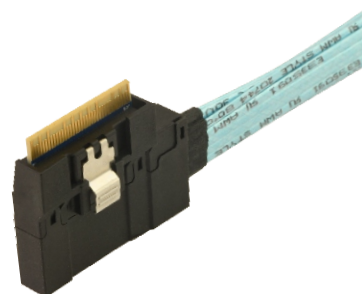

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG



06

SlimSAS 4I & 8I (Anti-skew) W/PULL TAB Series



SlimSAS 4I STR Anti-skew 38Pos W/PULL TAB



P/N: 7426369002/85Ω P/N: 7426369003/100Ω ● Outline Dimensions ● Technology Parameters

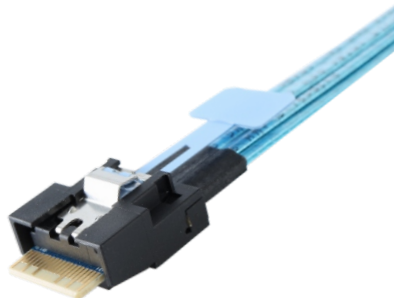

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I RA Anti-skew 38Pos W/PULL TAB



P/N: 7429078002/85Ω P/N: 7429078003/100Ω ● Outline Dimensions ● Technology Parameters

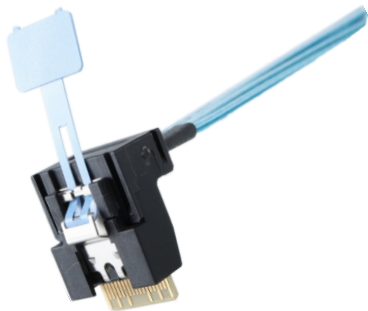

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I Right SE Anti-skew 38Pos W/PULL TAB



P/N: 7429078004/85Ω P/N: 7429078005/100Ω ● Outline Dimensions ● Technology Parameters

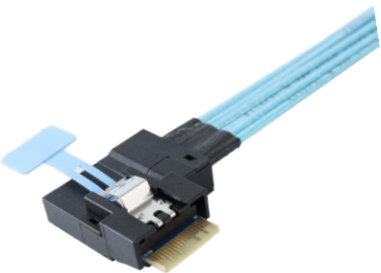

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 4I Left SE Anti-skew 38Pos W/PULL TAB


P/N: 7430731002/85Ω P/N: 7430731003/100Ω ● Outline Dimensions ● Technology Parameters

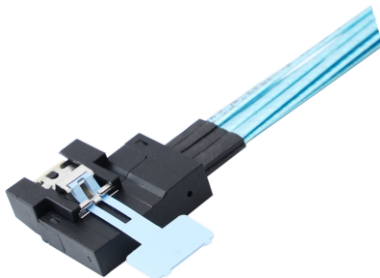

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I STR Anti-skew 74Pos W/PULL TAB



P/N: 7425813001/85Ω P/N: 7430706001/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I RA Anti-skew 74Pos W/PULL TAB



P/N: 7429553001/85Ω P/N: 7429553002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I Right SE Anti-skew 74Pos W/PULL TAB



P/N: 7429553003/85Ω P/N: 7429553004/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

SlimSAS 8I Left SE Anti-skew 74Pos W/PULL TAB


P/N: 7429553005/85Ω P/N: 7429553006/100Ω ● Outline Dimensions ● Technology Parameters

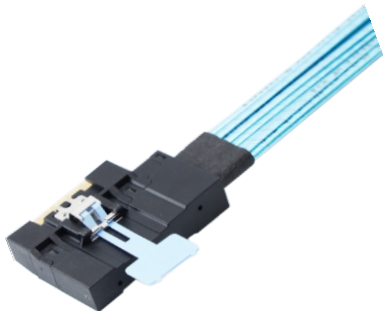

- 1.1 Series: SlimSAS
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

07

Omni Edge ASM 8I W/PULL TAB Series





Omni Edge ASM STR 74Pos W/PULL TAB

P/N: 7433609001/85Ω

● Outline Dimensions

● Technology Parameters

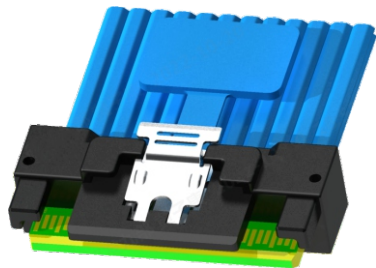



- 1.1 Series: Omni Edge ASM
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Omni Edge ASM RA 74Pos W/PULL TAB

P/N: 7433609002/85Ω

● Outline Dimensions

● Technology Parameters

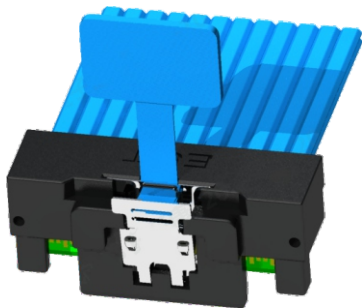

- 1.1 Series: Omni Edge ASM
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

08

GNE Z Series




GEN Z 1C(4I 56Pos) STR

P/N: 7422934001/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

GEN Z 2C(8I 84Pos) STR

P/N: 7422934002/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

LP GEN Z 1C(4I 56Pos) STR W/PULL TAB

P/N: 7422934003/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

GEN Z 1C(4I 56Pos) RA W/PULL TAB

P/N: 7422934004/85Ω

● Outline Dimensions

● Technology Parameters





- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

LP GEN Z 2C(8I 84Pos) STR W/PULL TAB

P/N: 7422934005/85Ω

● Outline Dimensions

● Technology Parameters

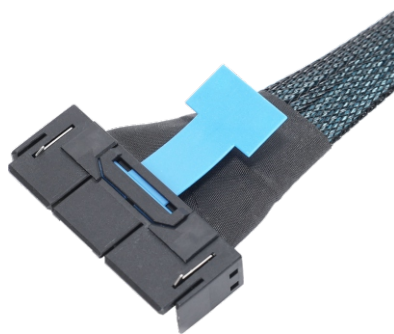



- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

LP GEN Z 2C(8I 84Pos) RA W/PULL TAB

P/N: 7422934006/85Ω

● Outline Dimensions

● Technology Parameters

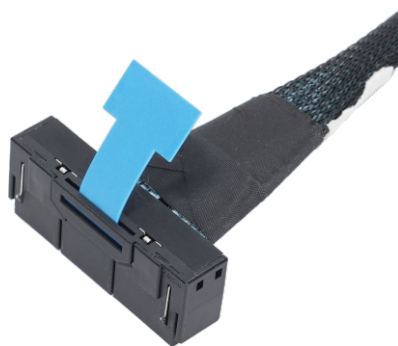


- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

LP GEN Z 4C(16I 140Pos) STR W/PULL TAB

P/N: 7422934007/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

LP GEN Z 4C(16I 140Pos) RA W/PULL TAB

P/N: 7422934008/85Ω

● Outline Dimensions

● Technology Parameters





- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG

GEN Z 4C+(168POS) STR W/PULL TAB

P/N: 7422934009/85Ω

● Outline Dimensions



● Technology Parameters

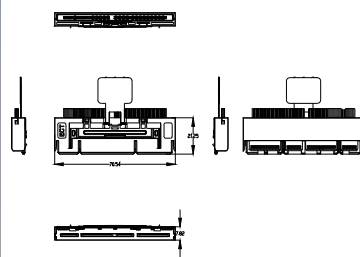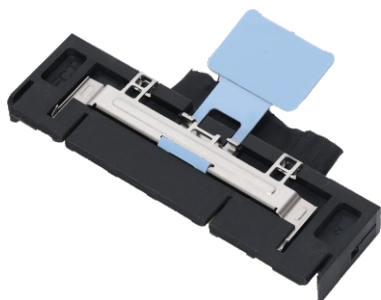

- 1.1 Series: GEN Z
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&100Ω
- 1.4 Wire Gauge: 34AWG-30AWG



09

Mini Cool Edge IO(MCIO) Series



MCIO 12I STR 74Pos


P/N: 7430143002/85Ω P/N: 7430143003/100Ω ● Outline Dimensions ● Technology Parameters

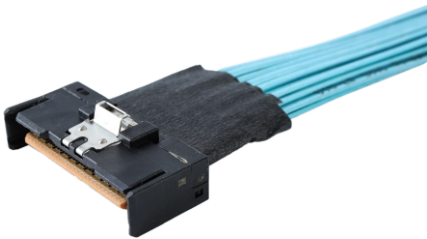

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I STR 74Pos W/PULL TAB



P/N: 7430147001/85Ω P/N: 7430147002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I RA 74Pos



P/N: 7431454002/85Ω P/N: 7431454004/100Ω ● Outline Dimensions ● Technology Parameters

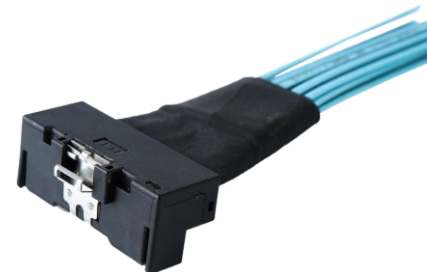

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I RA 74Pos W/PULL TAB



P/N: 7431454001/85Ω P/N: 7431454003/100Ω ● Outline Dimensions ● Technology Parameters

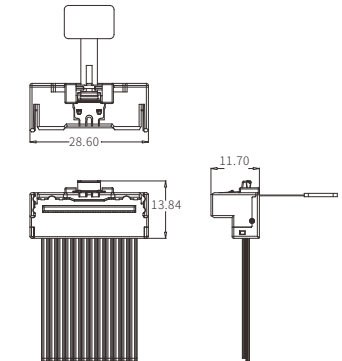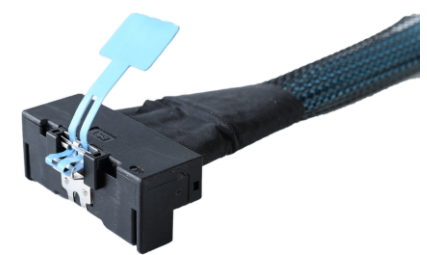

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I STR 38Pos W/PULL TAB



P/N: 7435834001/85Ω P/N: 7435834002/100Ω ● Outline Dimensions ● Technology Parameters

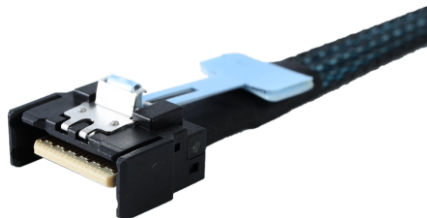

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I STR 38Pos


P/N: 7435835001/85Ω P/N: 7435835002/100Ω ● Outline Dimensions ● Technology Parameters

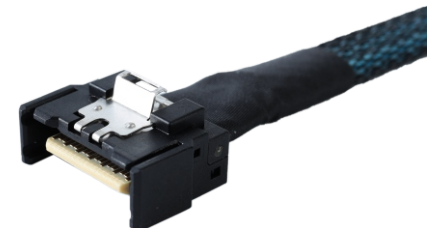

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I RA 38Pos W/PULL TAB


P/N: 7435836001/85Ω P/N: 7435836002/100Ω ● Outline Dimensions ● Technology Parameters

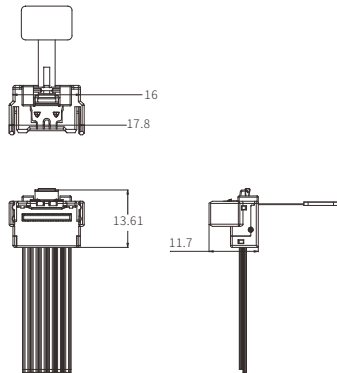

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I RA 38Pos


P/N: 7435837001/85Ω P/N: 7435837002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I R/E 38Pos Double Row W/PULL TAB


P/N: 7435838001/85Ω P/N: 7435838002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I R/E 38Pos Double Row



P/N: 7435839001/85Ω P/N: 7435839002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I L/E 38Pos Double Row W/PULL TAB



P/N: 7435840001/85Ω P/N: 7435840002/100Ω ● Outline Dimensions ● Technology Parameters

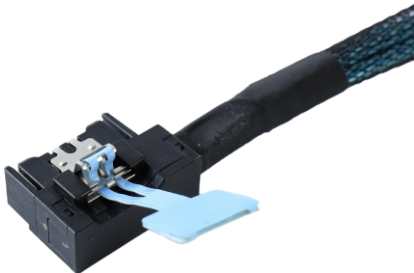

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 4I L/E 38Pos Double Row


P/N: 7435841001/85Ω P/N: 7435841002/100Ω ● Outline Dimensions ● Technology Parameters

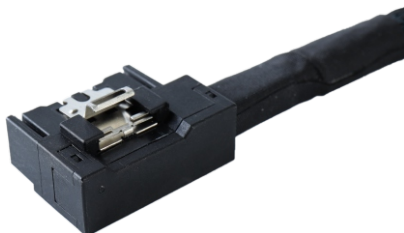

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I R/E 74Pos W/PULL TAB



P/N: 7435842001/85Ω P/N: 7435842002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I R/E 74Pos



P/N: 7435843001/85Ω P/N: 7435843002/100Ω ● Outline Dimensions ● Technology Parameters

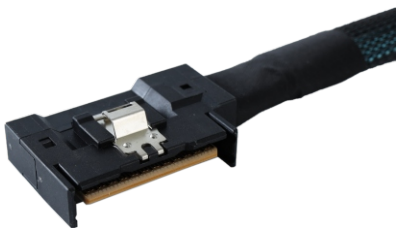

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I L/E 74Pos W/PULL TAB


P/N: 7435844001/85Ω P/N: 7435844003/100Ω ● Outline Dimensions ● Technology Parameters

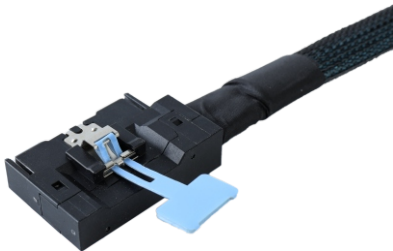

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 12I L/E 74Pos



P/N: 7435845001/85Ω P/N: 7435845002/100Ω ● Outline Dimensions ● Technology Parameters



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 16I STR 124Pos W/PULL TAB



P/N: 7435846001/85Ω P/N: 7435846002/100Ω ● Outline Dimensions ● Technology Parameters

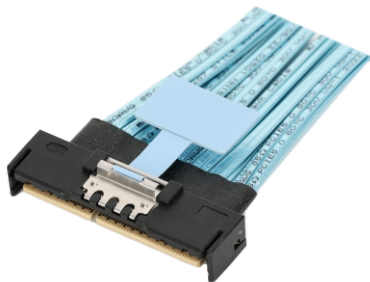

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 16I STR 124Pos

P/N: 7435847001/85Ω P/N: 7435847002/100Ω ● Outline Dimensions ● Technology Parameters




- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 16I R/A 124Pos W/PULL TAB

P/N: 7435848001/85Ω P/N: 7435848002/100Ω

● Outline Dimensions

● Technology Parameters





- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO 16I R/A 124Pos

P/N: 7435849001/85Ω P/N: 7435849002/100Ω

● Outline Dimensions

● Technology Parameters

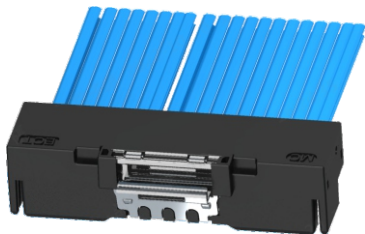



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω&95Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO LE 74POS W/PULL TAB (Anti-skew curved wire)

P/N: 7435849003/85Ω

● Outline Dimensions

● Technology Parameters

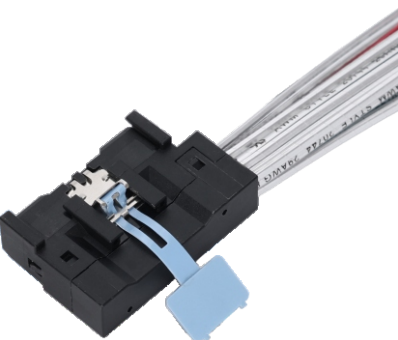



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO LE 74POS W/PULL TAB (Anti-skew curved wire)

P/N: 7435849004/85Ω

● Outline Dimensions

● Technology Parameters

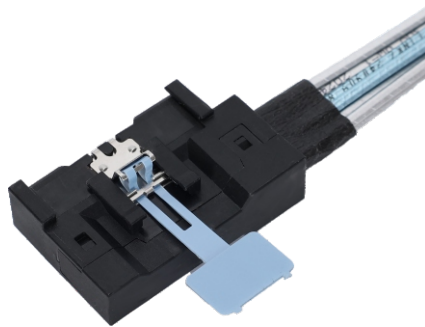



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO RA 74POS W/PULL TAB(Anti-skew)

P/N: 7435849005/85Ω

● Outline Dimensions

● Technology Parameters

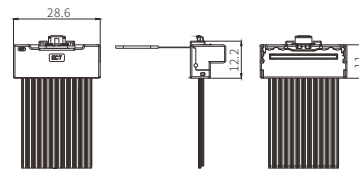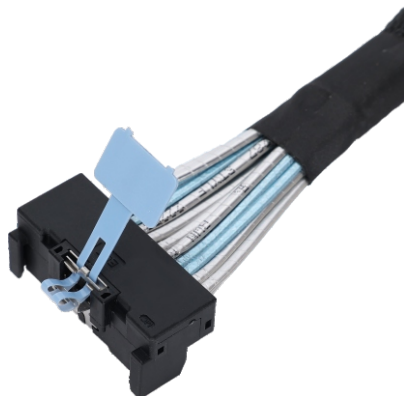


- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO RE 74POS W/PULL TAB(Anti-skew curved wire)

P/N: 7435849006/85Ω

● Outline Dimensions

● Technology Parameters

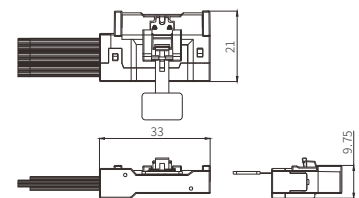



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO RE 74POS W/PULL TAB(Anti-skew curved wire)

P/N: 7435849007/85Ω

● Outline Dimensions

● Technology Parameters

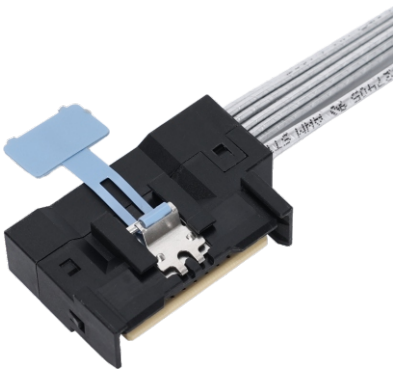



- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO RA 38POS W/PULL TAB(Anti-skew)

P/N: 7435849008/85Ω

● Outline Dimensions

● Technology Parameters

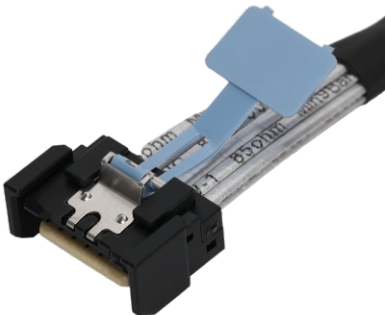


- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO RA 124POS W/PULL TAB(Anti-skew)

P/N: 7435849009/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MCIO STR 124POS W/PULL TAB(Anti-skew)

P/N: 74358490010/85Ω

● Outline Dimensions




● Technology Parameters

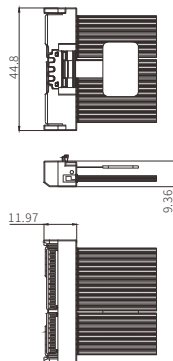

- 1.1 Series: Mini Cool Edge IO
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

10

Multi Trak Series




MULTI-TRAK 16X RAD

P/N: 7450115001/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MULTI-TRAK 16X PM VT

P/N: 7450116001/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MULTI-TRAK 16X RRAD

P/N: 7450115002/85Ω

● Outline Dimensions

● Technology Parameters




- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MULTI-TRAK 16X PM RVT

P/N:7450116002/85Ω

● Outline Dimensions

● Technology Parameters





- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

MULTI-TRAK 16X RVT

P/N:7444066001/85Ω

● Outline Dimensions

● Technology Parameters

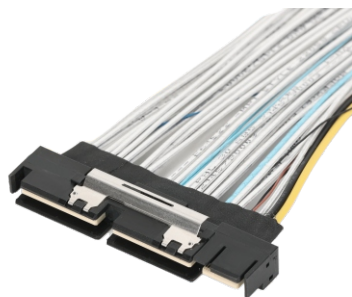


- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Multi Trak POWER 21A STR

P/N: 7450118010/85Ω

● Outline Dimensions

● Technology Parameters





- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Multi Trak 8X 34A STR

P/N: 7450118019/85Ω

● Outline Dimensions

● Technology Parameters

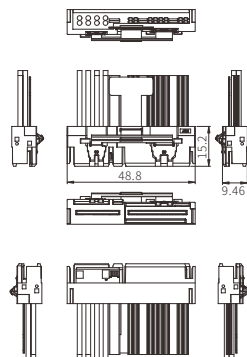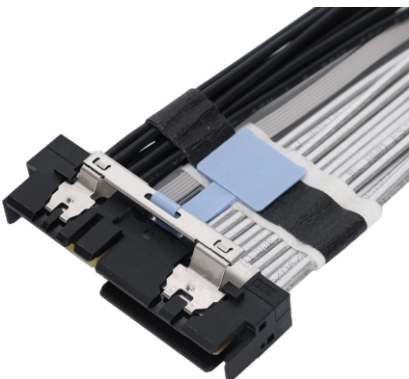



- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Multi Trak 8X 21A STR

P/N: 7450118023/85Ω

● Outline Dimensions

● Technology Parameters

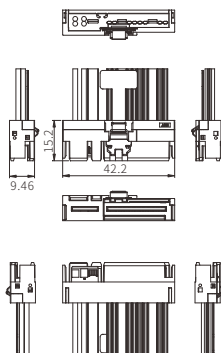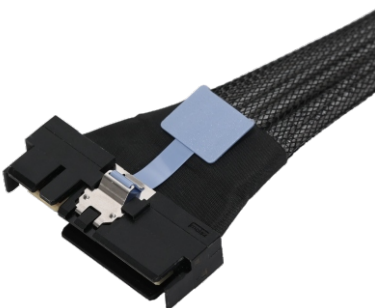



- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Multi Trak 8X 21A RA

P/N: 7450118024/85Ω

● Outline Dimensions

● Technology Parameters





- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

Multi Trak 8X 21A RRA

P/N: 7450118025/85Ω

● Outline Dimensions


● Technology Parameters

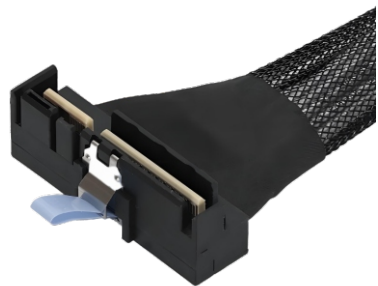


- 1.1 Series: MULTI-TRAK 16X
- 1.2 Pitch: 0.6mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

11

DA CEM Series





- 1.1 Series: DA CEM
- 1.2 Pitch: 1.0mm
- 1.3 Impedance: 85Ω
- 1.4 Wire Gauge: 34AWG-30AWG

ENTERPRISE CULTURE



Enterprise spirit

Respectful, Trustworthy, Learn, Benevolent



Business philosophy

People-oriented, technology-driven, customer-respected, and integrity-based



Corporate mission

Provide high-precision and high-reliability connector products and services for global partners.



Corporate Vision

To become the leader in the global connector industry and serve as a benchmark for the internationalization of national enterprises!



Core competitiveness of an enterprise

Continuously cultivate and gather the most outstanding technical, design, manufacturing and service talents Enable the capable to create greater value.

COMPANY RESPONSIBILITY



Employee Health Protection

Establish a comprehensive rights and interests protection system and growth support mechanism to protect the life and health of enterprise workers.



Cultural Construction

Establish a corporate culture system to provide a good employment environment for employees.



Public Liability

Established public accountability system, advocated safe production and environmental protection, promoted energy conservation and pollution reduction and used clean energy to commit to human ecological harmony and social harmony.



Development Science And Technology

Attach great importance to the development of technology and become a technology-oriented enterprise.



Sustainable Development

Sustainable environment, sustainable operation. Adhere to the scientific outlook on development, pay attention to environmental protection, and take the road of sustainable development.



Develop Enterprise Public Welfare And Strive For A Harmonious Society

Pursue the unity of social effect and economic benefit. To undertake the due responsibility for the healthy development of society and enterprises.

DEVELOPMENT STRATEGY

Technological Innovation

Promote technical innovation in the connector industry, open up the industrial chain from the chip end to the manufacturing and application end, and enhance the market competitiveness of the company in the pan-5G era.

Solution Provision

Play the leading role of technology research and development, continue to promote the development and achievement transformation of the new generation of RF technology and product miniaturization, and strive to become a professional connector manufacturer to provide customers with a complete set of connection solutions.

Industry-university-research Cooperation

Continue to deepen industry-university-research cooperation with research institutes, universities and other institutions. Promoting the transformation of scientific and technological achievements, accelerate the establishment of innovative R&D system with the company as the main body, the market as the guidance, and the close combination of government, industry, education and research. Improve the ability of independent innovation to ensure that the company in cutting-edge technology trends, new product research, research projects, personnel training and reserve to make a forward-looking layout.

Overseas Strategy

Promote overseas strategic layout and increase the scale of international market share.



CONTACT US

Email: salescn@ects.com

Website: www.ects.com

No. 171 Changfeng Road, Yutang Street, Guangming District, Shenzhen, China

ECT has expanded the range of market leading products with cutting-edge technology to provide our customers with interconnected world solutions to take their products to a new level continuously since 2006. As the business world becomes more and more highly integrated, interconnected business opportunities are being created and applied on a daily basis. We have grown steadily over the past decade and are committed to bringing value to our customers in consumer electronics, communication devices, Internet of Things and in-vehicle connectivity applications.

Competitive products...

ECT is willing to share our experience with cooperative partners to promote common development. Put us to the test on how competitive of our connectivity products— contact us for a quote.

Technical and solution advice...

Whether you want to find out why your current connectivity solution does not work the way you think it should be or ask us about an connected solution for a new project you are working on — we welcome your call. Our one-stop interconnect technology solution helps optimize your design for better connectivity.