


文档密级：
商业秘密

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN241856	FIRST EDITION	05/10'24	Weijie	Martin	ken

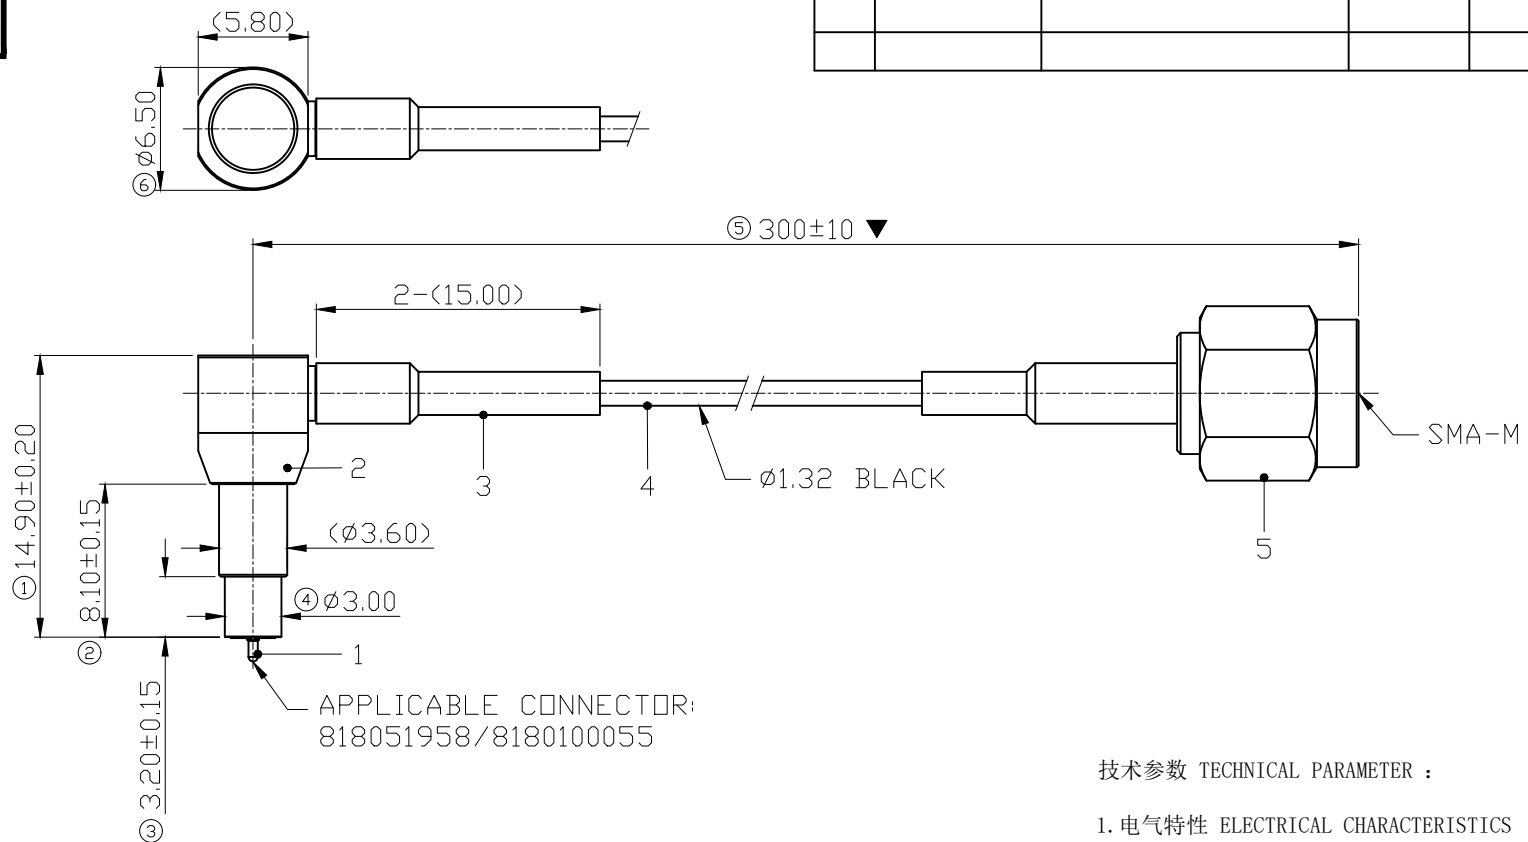

技术参数 TECHNICAL PARAMETER :

1. 电气特性 ELECTRICAL CHARACTERISTICS
 特性阻抗 CHARACTERISTIC IMPEDANCE: 50 Ω;
 频率范围 FREQUENCY RANGE : DC-11 GHZ;
 电压驻波比 V. S. W. R: <1.4@DC-3GHZ;<1.8@3-6GHZ;<2.2@6-11GHZ;
 插入损耗 INSERTION LOSS: 1.7MAX@DC-3GHZ;2.8MAX@3-6GHZ;3.8MAX@6-11GHZ;
 耐压 WITHSTANDING VOLTAGE: > 100 V AC/1MIN;
2. 机械特性 MECHANICAL PROPERTIES ;
 耐久性 DURABILITY: > 1000 CYCLES;
3. 环境特性 ENVIRONMENTAL CHARACTERISTICS ;
 工作温度范围 RANGE OF WORKING TEMPERATURE : -40 °C~+85°C;
 湿度范围 HUMIDITY RANGE : 15%~85%;
 有害物质需符合ECT《QE-Q-19-001环境有害物质管理基准》管控标准。
 HAZARDOUS SUBSTANCES SHALL COMPLY WITH ECT《QE-9-19-001
 ENVIRONMENTAL HAZARDOUS SUBSTANCES MANAGEMENT BENCHMARK "CONTROL
 STANDARD IT.

5	SMA	镀金 GOLD PLATED
4	CABLE	黑色 BLACK
3	热缩套管 HEATSHINK SLEEVE HEATSHINK SLEEVE	黑色 BLACK
2	主体 ONTOLOGY	钝化 PASSIVATION
1	中心针 CENTER PIN	镀金 GOLD PLATED
NO.	DESCRIBE	FINISH

	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: Weijie	DATE: 05/10'24	DWG.NO: 600-52947-01	TITLE: MINI RF 2GEN TO SMA-M,L300	REV. A
	X.X.± 0.40	XX.°± 2°	UNIT: mm	CHECK:	DATE:	PARTS NO.(INTENDED USE):	818052947	SHEET: 1/1
	X.± 0.25	X.°± 1°	SIZE: A4	APPROVE:	DATE:			
	.X± 0.15	.X°± 0.5°						