


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved
A	ECR11589	FIRST RELEASE	07/13'11	胡海星	SMA	SMA
B	ECN180311	修正产品外形	02/26'18	Martin	Ken	tan



Note:

- 1.1 Voltage Rating: 250VAC
- 1.2 Current Rating: 1A
- 1.3 Operation Temperature Range: -30°C ~ +85°C
- 1.4 Storage Temperature Range: -45°C ~ +85°C
- 1.5 Operation Relative Humidity: 95%R. H. Max.
- 1.6 Electric Power: 4W
- 1.7 Impedance: 50 Ω
- 1.8 Insulation resistance: More than 1,000 MΩ
- 1.9 Withstanding Voltage: 1 min/ Ac 100Vrms
- 2.0 VSWR: 1.5 (0-3GHz) Insertion loss : 1.6dB (0-3GHz)

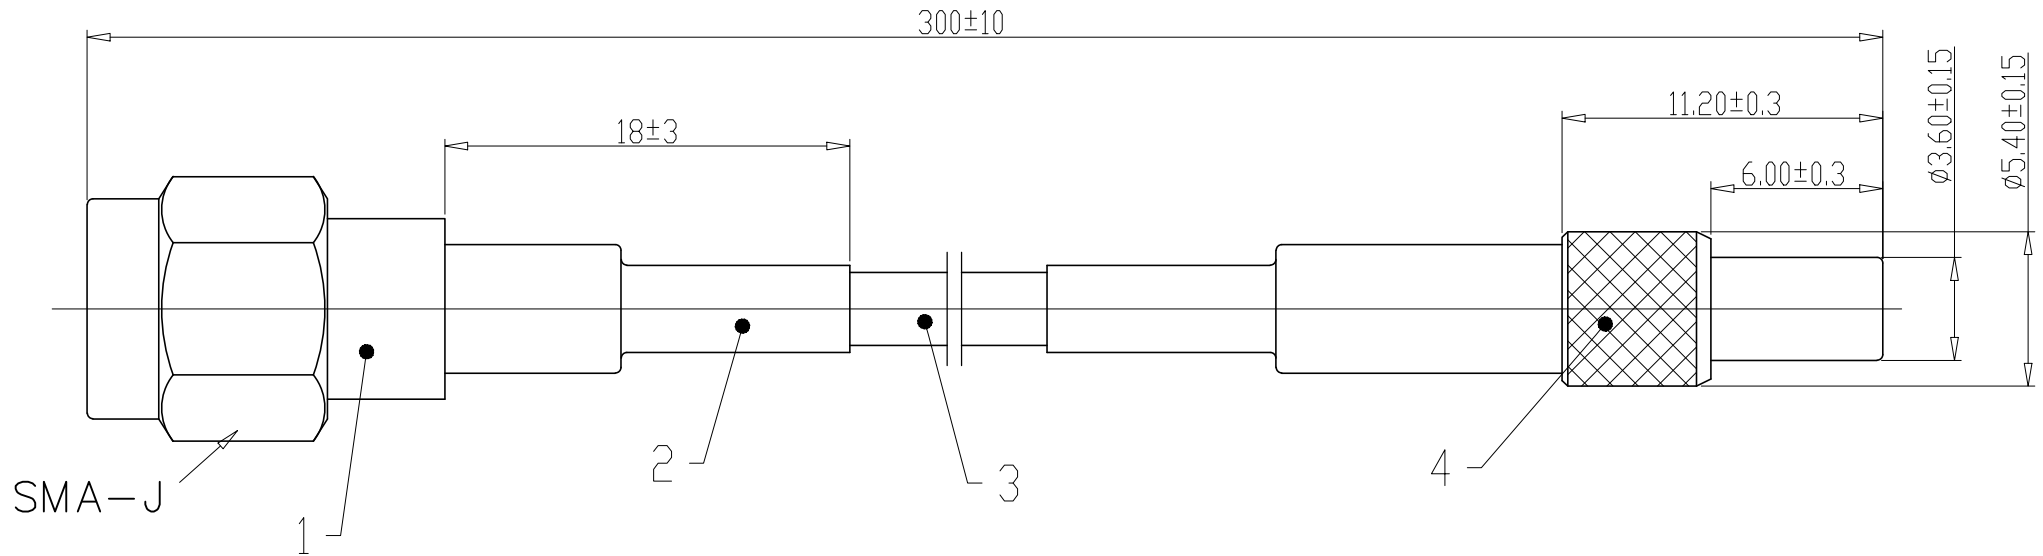

818000407	4	SCS RF PLUG CONNECTOR	1
	3	1.5D-2V电缆	300 mm
	2	热缩套管 L=18mm	2
	1	SMAJ连接器, 适配RG174电缆	1
料号 Part No.	序号 Item	描述 Des.	数量 Finish



GENERAL TOLERANCE	
XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.20	.X° ±1.0°
.XX ±0.13	.XX° ±0.5°

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	SCF	DATE	01/10'17
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	600-0407-01
PARTS NO.(INTENDED USE)	818000407

TITLE	ASSEMBLY DRAWING PLUG ASSEMBLY FOR SCS RF CONNECTOR WITH SWITCH
-------	---

REV.	B
SHEET	1/1